

A

12/01/97
jc559 U.S. PTO

**Form 3.54 (modified) Division-Continuation Program Application
Transmittal Form**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No. TRAK/02/222
Anticipated Classification of
this application:
Class 364 Subclass 436
Prior application:
Examiner M. Zanelli
Art Unit 2304

Assistant Commissioner of Patents
BOX: CON/DIV APP
Washington D.C. 20231

This is a Request for filing a ___ continuation-in-part ___ continuation X divisional application under 37 CFR 1.60 of prior application Serial No. 08/549,380 filed on October 27, 1995, by Chris C. Smith, Kenneth W. Edwards entitled FULLY AUTOMATED VEHICLE DISPATCHING, MONITORING AND BILLING.

1. ☒ Enclosed is a copy of the prior application, including the oath or declaration as originally filed. This transmittal constitutes a declaration verifying it as a true copy. (See 9 and 9a for drawing requirements). A copy of the papers of the prior application as filed which are attached are as follows: 80 pages of specification; 15 pages of claims; 1 page abstract; 19 sheets of Informal drawings; 2 pages Declaration and Power of Attorney.
2. ☐ Prepare a copy of the prior application.
3. ☒ The filing fee is calculated below:
4. ☒ A verified statement to establish small entity status under 37 C.F.R. 1.9 and 37 C.F.R. 1.27 is attached hereto.

**CLAIMS AS FILED IN THE PRIOR APPLICATION,
LESS ANY CLAIMS CANCELLED,
PLUS ANY CLAIMS ADDED, BY AMENDMENT BELOW**


For:	(Col. 1)	(Col. 2)	Small Entity		Large Entity	
	No. Filed	No. Extra	Rate	Fee	Rate	Fee
Basic Fee:				395		790
Total Claims:	2 - 20	= 0	X \$11	___	X \$22	0
Independent Claims:	2 - 3	= 0	X \$41	___	X \$82	0
Multiple Dependent Claims Presented:			+ \$135	___	+ \$270	0
			TOTAL:	<u>395.00</u>	TOTAL:	___

5. ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Account No. 23-3000.
6. ☒ A check in the amount of \$ 395.00 is enclosed.
7. ☒ Please amend the application as follows: Cancel in this application original claims 1-31 and 34-36 of the prior application, without prejudice or disclaimer, before calculating the filing fee.
8. ☒ Amend the specification by inserting before the first line the following:
Related Applications
This is a continuation application of application Serial No. 08/549,380 filed on October 27, 1995, for FULLY AUTOMATED VEHICLE DISPATCHING, MONITORING AND BILLING.
9. ☐ Transfer the drawings from the prior application to this application and abandon said prior application as of the filing date accorded this application. A duplicate copy of this sheet is enclosed for filing in the prior application file.
- 9a. ☒ New formal drawings are enclosed.
- 9b. ☐ Priority of application Serial No. [filed on [in [is claimed under 35 USC 119.

The certified copy has been filed in prior application Serial No. [filed [.
10. ☐ The prior application is assigned of record to _____. A copy of the assignment of the invention is attached.
11. ☒ The power of attorney in the prior application is to Thomas W. Humphrey, 34,353 et al.
- a. ☒ The power appears in the original papers in the prior application.
- b. ☐ Since the power does not appear in the original papers, a copy of the power in the prior application is enclosed.
- c. ☒ Address all future communications to Thomas W. Humphrey, c/o WOOD, HERRON & EVANS, L.L.P., 2700 Carew Tower, 441 Vine Street, Cincinnati, Ohio 45202.
12. ☐ A preliminary amendment is enclosed.
13. ☒ I hereby verify that the attached papers are a true copy of prior application Serial No. 08/549,380 as originally filed on October 27, 1995.

The undersigned declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

WOOD, HERRON & EVANS, L.L.P.

By 
Thomas W. Humphrey
Reg. No. 34,353

2700 Carew Tower, 441 Vine Street
Cincinnati, OH 45202
Phone: 513/241-2324
Facsimile: 513/421-7269

Applicant : Chris C. Smith, Kenneth W. Edwards
Attorney Docket No. : TRAK/02/222
Serial No. : 08/549,380
Filed : October 27, 1995
For : FULLY AUTOMATED VEHICLE DISPATCHING MONITORING AND BILLING

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am an official of the small business concern identified below and am empowered to act on behalf of the concern:

NAME OF CONCERN Total Technology, Inc.
ADDRESS OF CONCERN 607 W. McMicken Avenue, Cincinnati, Ohio 45214

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when, either directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled FULLY AUTOMATED VEHICLE DISPATCHING MONITORING AND BILLING by inventor(s) Chris C. Smith and Kenneth W. Edwards described in the specification attached hereto.

The above small business concern has not assigned, granted, conveyed or licensed and is under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(a).

No such assignments have been made or are obligated to be made.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or patent to which this verified statement is directed.

Chris C. Smith
NAME OF PERSON SIGNING

Pres.
TITLE OF PERSON SIGNING

5162 Fairway OAKS DR. Windermere, FL 34796
ADDRESS OF PERSON SIGNING

Chris C. Smith
SIGNATURE

11/26/97
DATE

2025 RELEASE UNDER E.O. 14176

DECLARATION, POWER OF ATTORNEY, AND PETITION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

FULLY AUTOMATED VEHICLE DISPATCHING, MONITORING AND BILLING

the specification of which was filed October 27, 1995 as Application Serial No. unknown, via Express Mail No. TB875314374US.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I hereby acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

And, I hereby appoint Richard H. Evans (R. No. 19,755), John D. Poffenberger (R. No. 20,245), Bruce Tittel (R. No. 22,324), Donald F. Frei (R. No. 21,190), David J. Josephic (R. No. 22,849), A. Ralph Navaro, Jr. (R. No. 23,050), David S. Stallard (R. No. 25,930), J. Robert Chambers (R. No. 25,448), Gregory J. Lunn (R. No. 29,945), Kurt L. Grossman (R. No. 29,799), Clement H. Luken, Jr. (R. No. 32,742), Thomas J. Burger (R. No. 32,662), Gregory F. Ahrens (R. No. 32,957), Joseph R. Jordan (R. No. 25,686), Wayne L. Jacobs (R. No. 35,553), Kurt A. Summe (R. No. 36,023), Keith R. Haupt (R. No. 37,638), Kevin G. Rooney (R. No. 36,330), C. Richard Eby (R. No. 25,854), Theodore R. Remaklus (R. No. 38,754), Thomas W. Humphrey (R. No. 34,353), David E. Pritchard (R. No. 38,273), J. Dwight Poffenberger, Jr. (R. No. 35,324), Stephen W. Barns (R. No. 38,037) and, of counsel, Herbert C. Brinkman (R. No. 16,955) in care of Wood, Herron & Evans, 2700 Carew Tower, Cincinnati, Ohio 45202, and telephone No. 513-241-2324, my attorneys/agents with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. All correspondence should be sent to Thomas W. Humphrey, Wood, Herron & Evans, 2700 Carew Tower, Cincinnati, Ohio 45202.

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Chris C. Smith

Full name of inventor

Chris C. Smith

Inventor's Signature

1/10/96

Date

United States

Citizenship

Edgewood, Kentucky

Residence

6 Sanctuary Court, Edgewood, KY 41017

Post Office Address

Kenneth W. Edwards

Full name of inventor

Kenneth W. Edwards

Inventor's Signature

1/10/96

Date

United States

Citizenship

Independence, Kentucky

Residence

1186 Constitution Drive, Independence, KY 41051

Post Office Address

CONFIDENTIAL

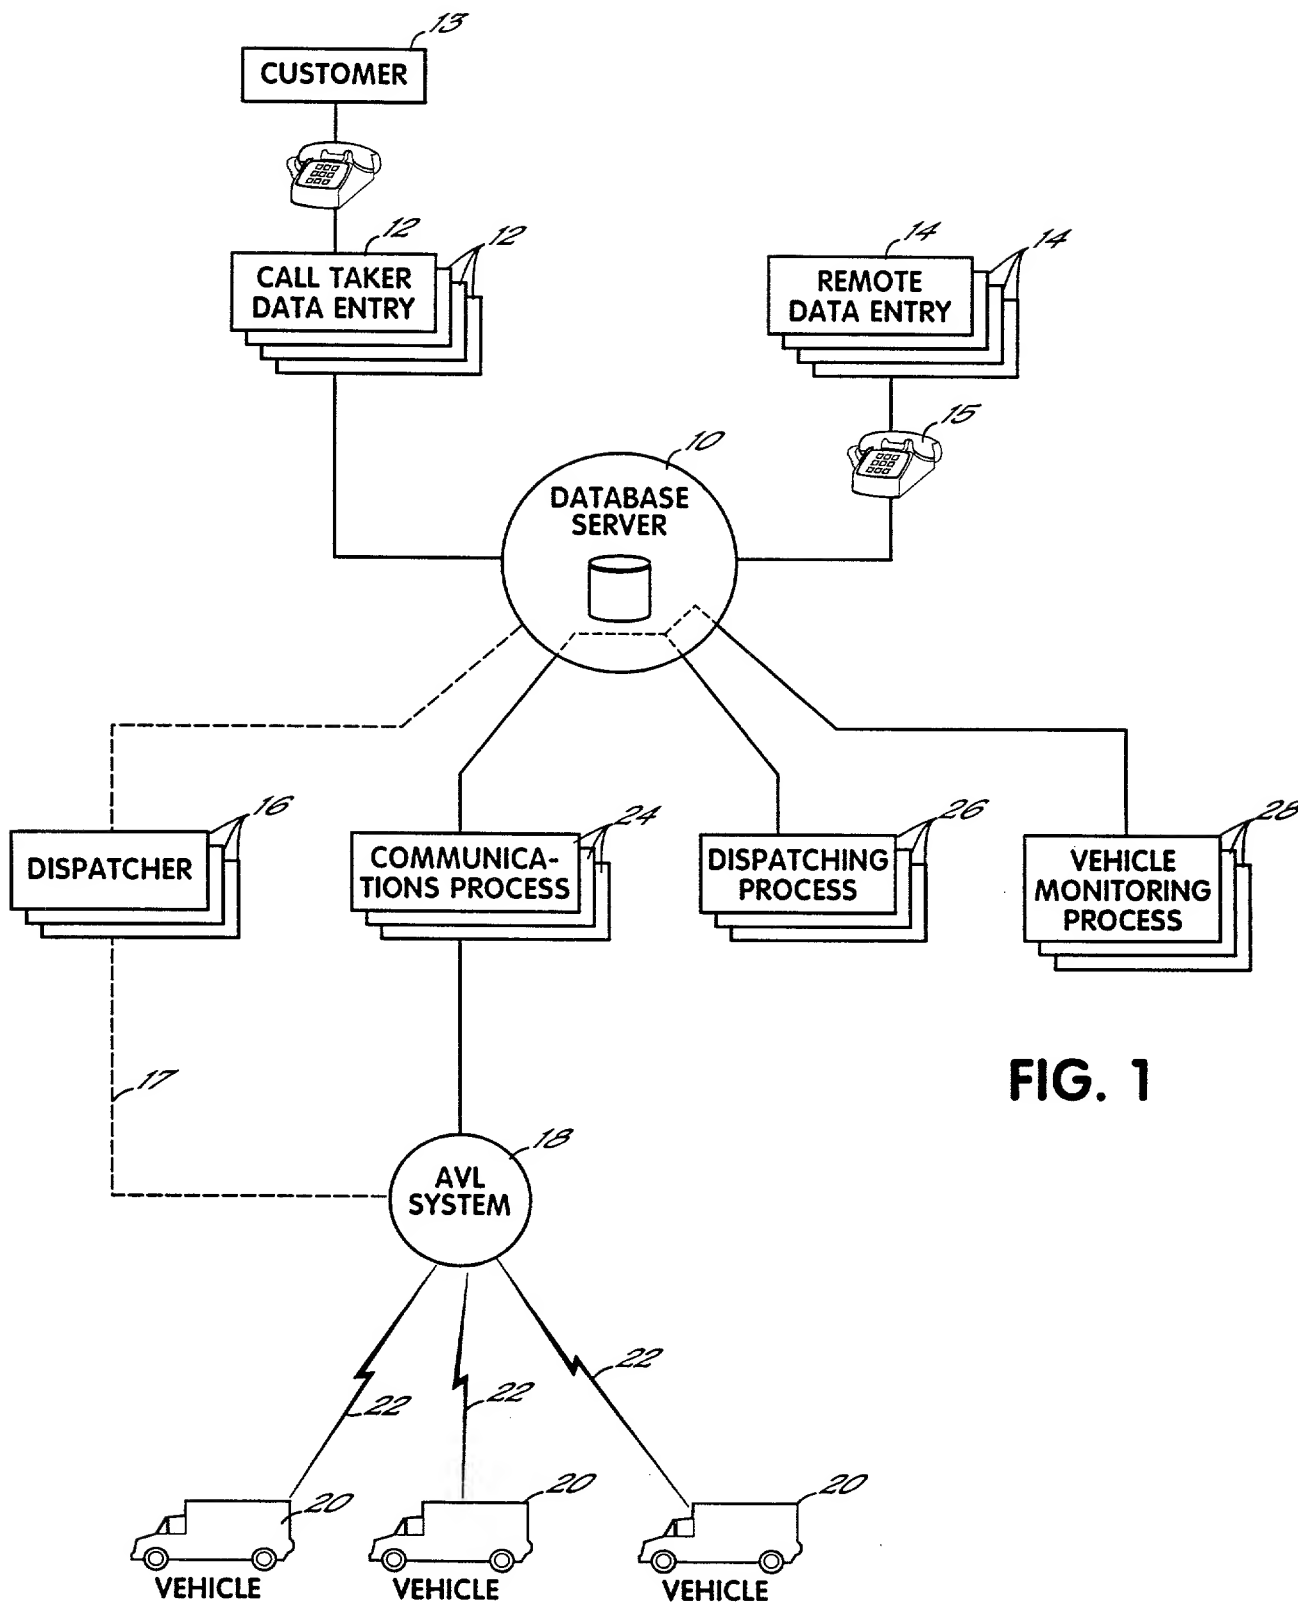


FIG. 1

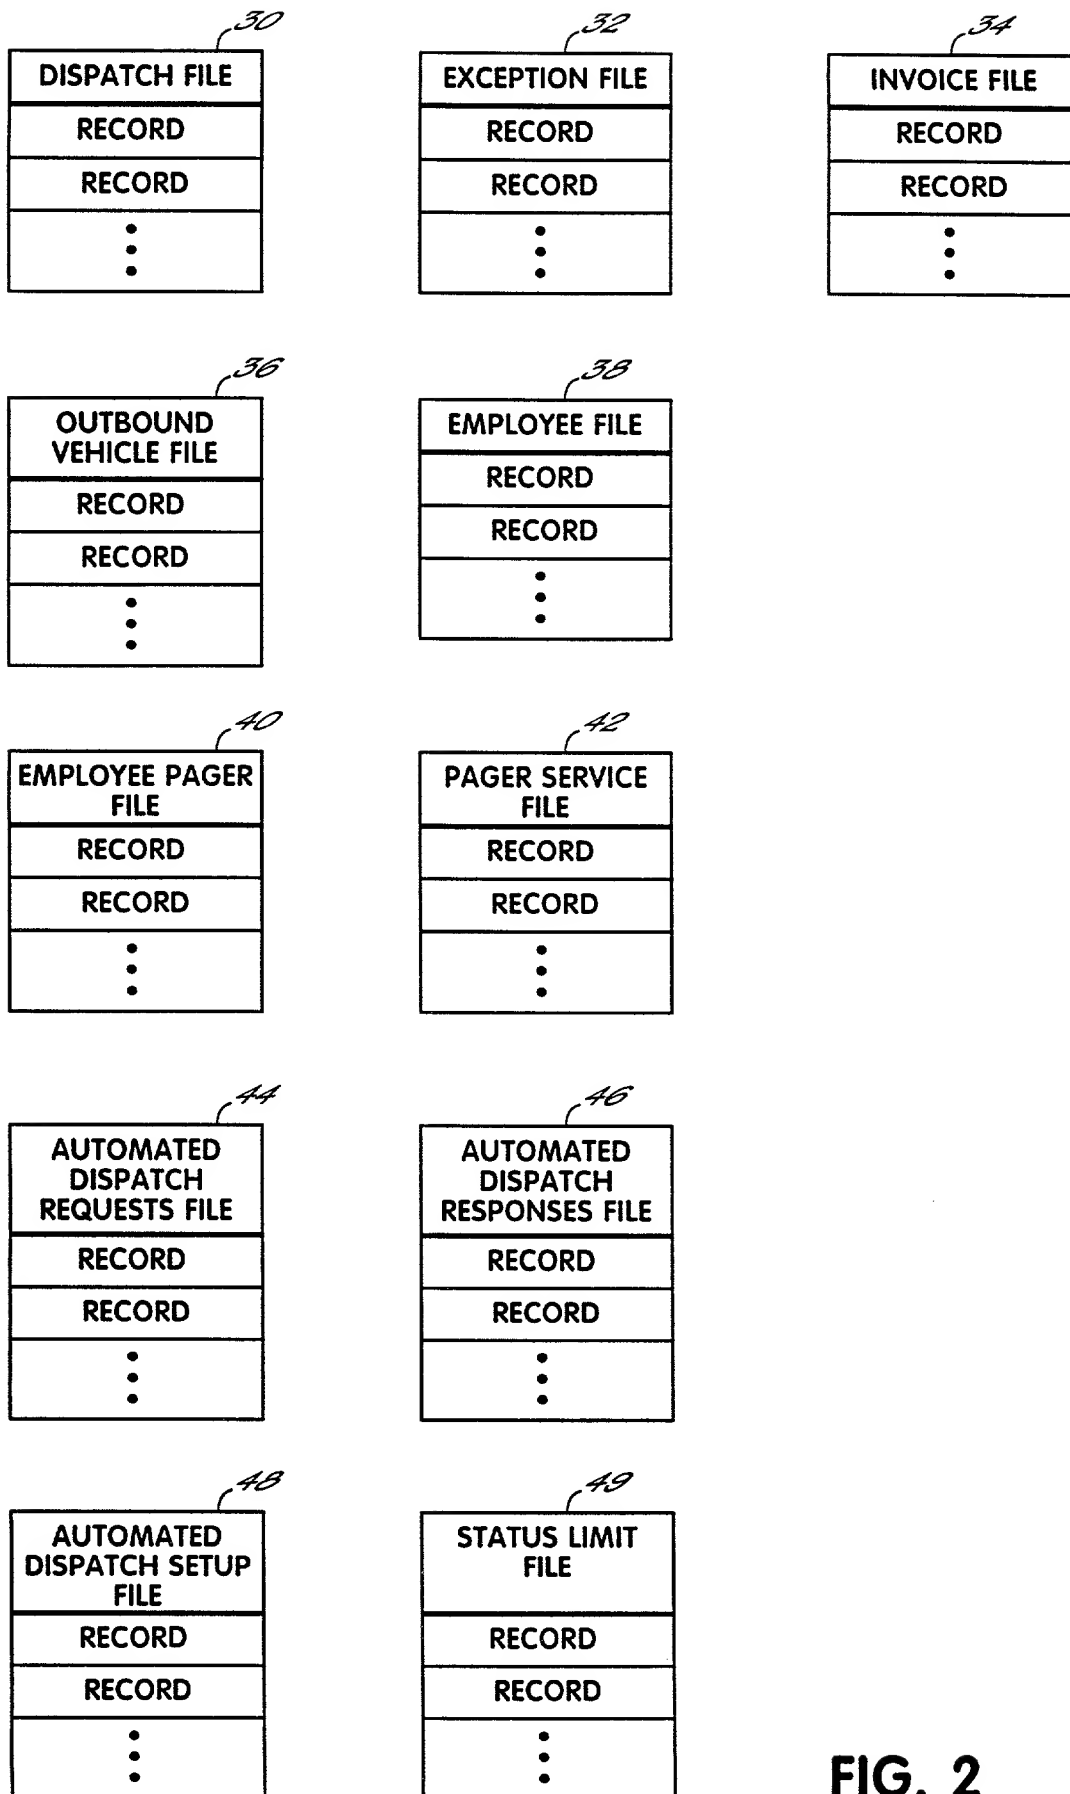


FIG. 2

<u>Dispatch File</u>	
1	Transport ID Number
2	Status Flag (= " ", "D", "C", or "F")
3	Date of Service
4	Appointment Time (= <time> or "ASAP")
5	Lead Time
6	Transport Type (Wheelchair/Basic/AdvancedLifeSupport)
7	Vehicle ID Number
8	Driver Employee Number
9	Attendant Employee Number
10	Pickup Location
11	Pickup Latitude
12	Pickup Longitude
13	Destination Location
14	Destination Latitude
15	Destination Longitude
16	Time of Call
17	Time Crew Notified
18	Time Crew Dispatched
19	Time Crew En Route to Pickup (Scene)
20	Time Crew Arrived at Pickup (Scene)
21	Time Crew En Route to Destination
22	Time Crew Arrived at Destination
23	Time Crew Reported as Available
24	Reason for transport 1
25	Reason for transport 2
26	Reason for transport 3
27	Reason for transport 4
28	Patient ID number
29	Name of caller
30	Contract number
31	Base rate codes
32	Mileage rate codes
33	Extra services rate codes
34	Billing address codes

FIG. 3A

<u>Invoice File</u>	
1	Transport ID Number
2	Date of Service
3	Vehicle ID Number
4	Driver Employee Number
5	Attendant Employee Number
6	Pickup Location
7	Destination Location
8	Time of Call
9	Time Crew Notified
10	Time Crew Dispatched
11	Time Crew En Route to Pickup (Scene)
12	Time Crew Arrived at Pickup (Scene)
13	Time Crew En Route to Destination
14	Time Crew Arrived at Destination
15	Time Crew Reported as Available
16	Reason for transport 1
17	Reason for transport 2
18	Reason for transport 3
19	Reason for transport 4
20	Patient ID number
21	Name of caller
22	Contract number
23	Base rate codes
24	Mileage rate codes
25	Extra services rate codes
26	Billing address codes

FIG. 3B

<u>Outbound Vehicle File</u>	
1	Vehicle ID Number
2	Transport ID Number

FIG. 3C

<u>Employee File</u>	
1	Employee ID Number
2	Employee Name

FIG. 3D

Employee Pager File

- 1 Employee ID Number
- 2 Pager Service Code Number
- 3 Pager PIN Number
- 4 Pager Phone Number
- 5 Text or Alpha ("T" or "A")

FIG. 3E

Pager Service File

- 1 Pager Service Code Number
- 2 Pager Service Modem Number
- 3 Pager Modem Login ID
- 4 Pager Modem Password
- 5 Pager Modem Baud Rate
- 6 Pager Modem Word Length
- 7 Pager Modem Stop Bits
- 8 Pager Modem Script Name

FIG. 3F

Automated Dispatch Requests File

Message Packet Key Code
 Terminal ID Number
 Transport ID Number
 Unique Sequence Number (000)
Message Body

FIG. 3G

Automated Dispatch Responses File

Message Packet Key Code
 Terminal ID Number
 Transport ID Number
 Unique Sequence Number (000)
Message Body

FIG. 3H

Automated Dispatch Setup File

- 1 Company Code
- 2 Dispatch Advance Action Setting (minutes)
- 3 Monitor Status Late Activity ("Yes"/"No")
- 4 AVL Port Operating System Name
- 5 AVL Port Lock File Name

FIG. 3I

Exception File

- 1 Transport ID Number
- 2 Exception code

FIG. 3J

Status Limit File

- 1 Company Code
- 2 Notified limit (minutes)
- 3 Dispatched limit (minutes)
- 4 En Route to Pickup limit (minutes)
- 5 Arrived limit (minutes)
- 6 En Route to Destination limit (minutes)
- 7 At Destination Limit (minutes)
- 8 ASAP Limit (minutes)

FIG. 3K

From CAD

record code = 01
record ID = transport number + terminal number + sequence (000)
transport / vehicle type (als / bls / w/c)
pick up address
pick up city
pick up state
pick up zip code
quantity of vehicle to return from search
CRC

FIG. 3K-1

From AVL

record code = 02
record ID = transport number + terminal number + sequence (000)
vehicle string (sorted closest to farthest away from address)
CRC

FIG. 3K-2

From CAD

record code = 10
record ID = transport number + terminal number + sequence (000)
vehicle ID number
pick up address
pick up city
pick up state
pick up zip
destination address
destination city
destination state
destination zip
CRC

FIG. 3L-1

From AVL

record code = 11
record ID = transport number + terminal number + sequence (000)
route string
CRC

FIG. 3L-2

[illegible][illegible][illegible][illegible][illegible]

Parameter	Value	Unit
Temperature	25.0	°C
Pressure	1.0	atm
Concentration	0.1	M
Time	10.0	min
Wavelength	400.0	nm
Scan Rate	1.0	nm/min
Resolution	0.5	nm
Slit Width	1.0	mm
Detector	Si	cm
Gain	1.0	—
Offset	0.0	—
Integration	1.0	—
Smoothing	1.0	—
Baseline	0.0	—
Peak Width	1.0	—
Peak Height	1.0	—
Peak Area	1.0	—
Peak Position	1.0	—
Peak Shape	1.0	—
Peak Intensity	1.0	—
Peak Wavelength	1.0	—
Peak Frequency	1.0	—
Peak Energy	1.0	—
Peak Momentum	1.0	—
Peak Mass	1.0	—
Peak Charge	1.0	—
Peak Spin	1.0	—
Peak Parity	1.0	—
Peak C-Parity	1.0	—
Peak B-Parity	1.0	—
Peak G-Parity	1.0	—
Peak J-Parity	1.0	—
Peak P-Parity	1.0	—
Peak T-Parity	1.0	—
Peak U-Parity	1.0	—
Peak V-Parity	1.0	—
Peak W-Parity	1.0	—
Peak X-Parity	1.0	—
Peak Y-Parity	1.0	—
Peak Z-Parity	1.0	—
Peak A-Parity	1.0	—
Peak S-Parity	1.0	—
Peak L-Parity	1.0	—
Peak K-Parity	1.0	—
Peak M-Parity	1.0	—
Peak N-Parity	1.0	—
Peak O-Parity	1.0	—
Peak P-Parity	1.0	—
Peak Q-Parity	1.0	—
Peak R-Parity	1.0	—
Peak S-Parity	1.0	—
Peak T-Parity	1.0	—
Peak U-Parity	1.0	—
Peak V-Parity	1.0	—
Peak W-Parity	1.0	—
Peak X-Parity	1.0	—
Peak Y-Parity	1.0	—
Peak Z-Parity	1.0	—
Peak A-Parity	1.0	—
Peak S-Parity	1.0	—
Peak L-Parity	1.0	—
Peak K-Parity	1.0	—
Peak M-Parity	1.0	—
Peak N-Parity	1.0	—
Peak O-Parity	1.0	—
Peak P-Parity	1.0	—
Peak Q-Parity	1.0	—
Peak R-Parity	1.0	—
Peak S-Parity	1.0	—
Peak T-Parity	1.0	—
Peak U-Parity	1.0	—
Peak V-Parity	1.0	—
Peak W-Parity	1.0	—
Peak X-Parity	1.0	—
Peak Y-Parity	1.0	—
Peak Z-Parity	1.0	—
Peak A-Parity	1.0	—
Peak S-Parity	1.0	—
Peak L-Parity	1.0	—
Peak K-Parity	1.0	—
Peak M-Parity	1.0	—
Peak N-Parity	1.0	—
Peak O-Parity	1.0	—
Peak P-Parity	1.0	—
Peak Q-Parity	1.0	—
Peak R-Parity	1.0	—
Peak S-Parity	1.0	—
Peak T-Parity	1.0	—
Peak U-Parity	1.0	—
Peak V-Parity	1.0	—
Peak W-Parity	1.0	—
Peak X-Parity	1.0	—
Peak Y-Parity	1.0	—
Peak Z-Parity	1.0	—
Peak A-Parity	1.0	—
Peak S-Parity	1.0	—
Peak L-Parity	1.0	—
Peak K-Parity	1.0	—
Peak M-Parity	1.0	—
Peak N-Parity	1.0	—
Peak O-Parity	1.0	—
Peak P-Parity	1.0	—
Peak Q-Parity	1.0	—
Peak R-Parity	1.0	—
Peak S-Parity	1.0	—
Peak T-Parity	1.0	—
Peak U-Parity	1.0	—
Peak V-Parity	1.0	—
Peak W-Parity	1.0	—
Peak X-Parity	1.0	—
Peak Y-Parity	1.0	—
Peak Z-Parity	1.0	—
Peak A-Parity	1.0	—
Peak S-Parity	1.0	—
Peak L-Parity	1.0	—
Peak K-Parity	1.0	—
Peak M-Parity	1.0	—
Peak N-Parity	1.0	—
Peak O-Parity	1.0	—
Peak P-Parity	1.0	—
Peak Q-Parity	1.0	—
Peak R-Parity	1.0	

From CAD

record code = 70

record ID = transport number + terminal number + sequence (000)

transport number

vehicle number

pickup street address

pickup city

pickup state

pickup zip code

destination street address

destination city

destination state

destination zip code

CRC

FIG. 3N-1

From AVL

record code = 71

record ID = transport number + terminal number + sequence (000)

transport number

pickup latitude

pickup longitude

destination latitude

destination longitude

CRC

FIG. 3N-2

From CAD

record code = 60
record ID = vehicle ID number
vehicle ID number
transport number
transport type
appointment time
transport status code
transport status time
driver employee number
attendant employee number
patient name
pick up address
pickup city
pickup state
pick up zip code
destination address
destination city
destination state
destination zip code
CRC

FIG. 30-1

From AVL

record code = 61
record ID = vehicle number
CRC

FIG. 30-2

From AVL

record code = 20
record ID = transport number + vehicle number
status level (1 - 8 from mobile data terminal switch device)
CRC

FIG. 3R-1

From CAD

record code 21
record ID = transport number + vehicle number
status level (1 - 8 returned for acknowledgment)
CRC

FIG. 3R-2

From AVL

record code = 50

record ID = vehicle ID number

CRC

FIG. 3P-1

From CAD

record code = 51

vehicle ID number

transport number

transport type

appointment time

transport status code

transport status time

driver employee number

attendant employee number

patient name

pick up address

pick up city

pick up state

pick up zip code

destination address

destination city

destination state

destination zip code

CRC

FIG. 3P-2

From CAD


record code = 40
 record ID = transport number + vehicle ID number + sequence (000)
 vehicle ID number
 transport number
 date of service
 appointment time
 transport type
 patient name
 patient phone number
 pick up street address
 pick up city
 pick up state
 pick up zip code
 destination street address
 destination city
 destination state
 destination zip code
 reason for transport 1
 reason for transport 2
 reason for transport 3
 reason for transport 4
 time of call
 notified
 dispatched
 in route
 arrive pick up
 in route
 arrive destination
 available
 CRC

FIG. 3Q-1

From CAD

record code = 41
 record ID = transport number + vehicle ID number + sequence (000)
 vehicle ID number
 CRC

FIG. 3Q-2

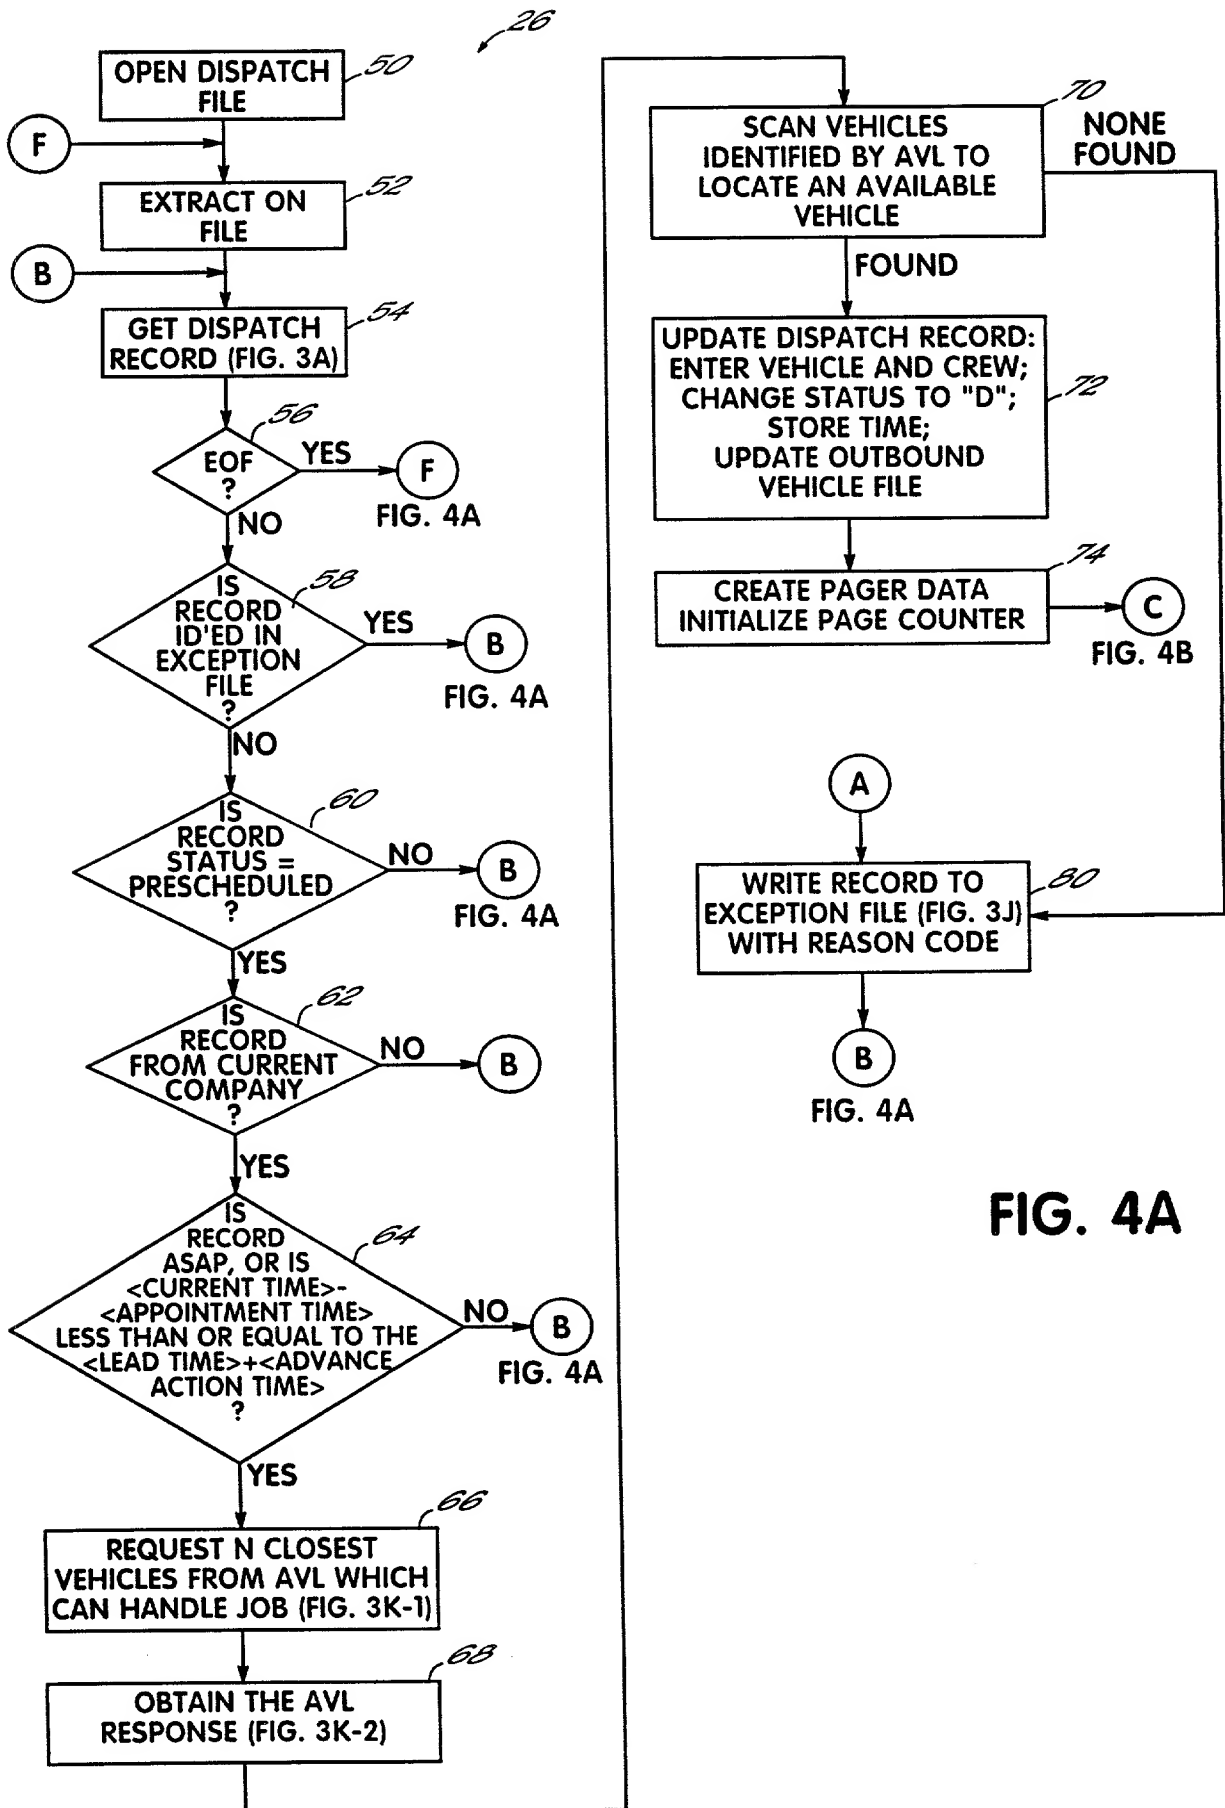

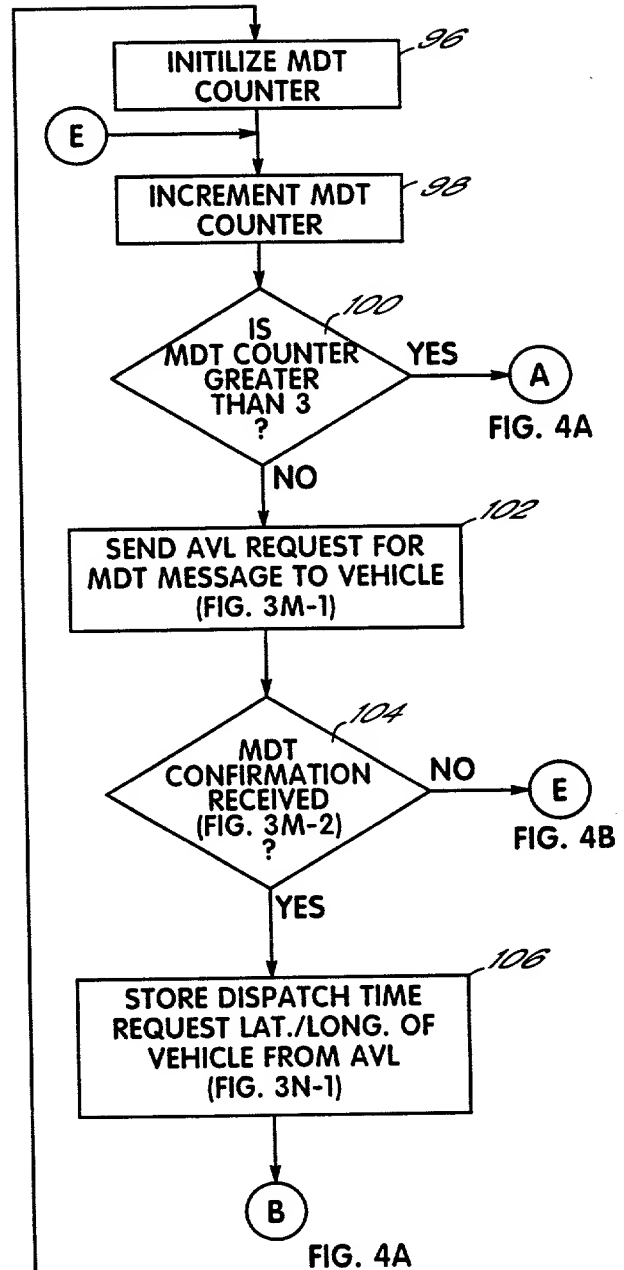
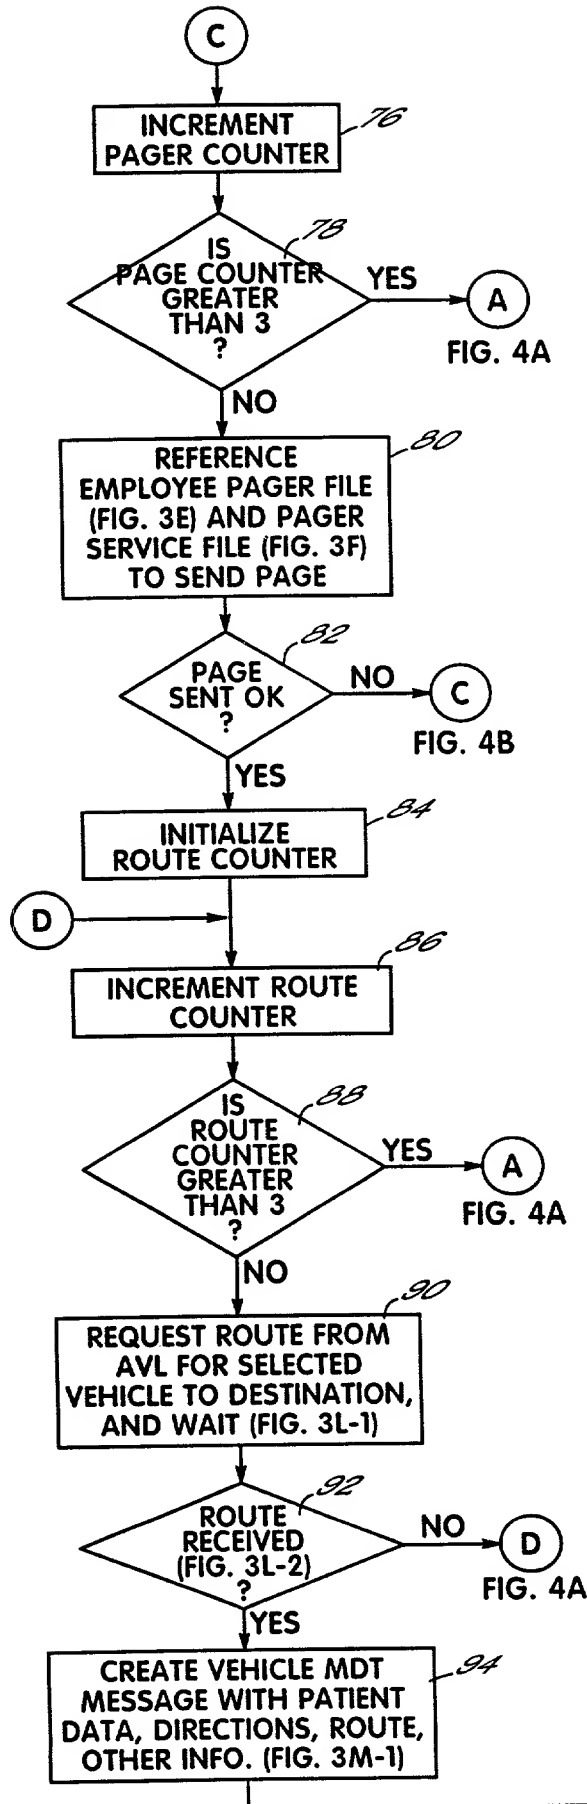


FIG. 4B

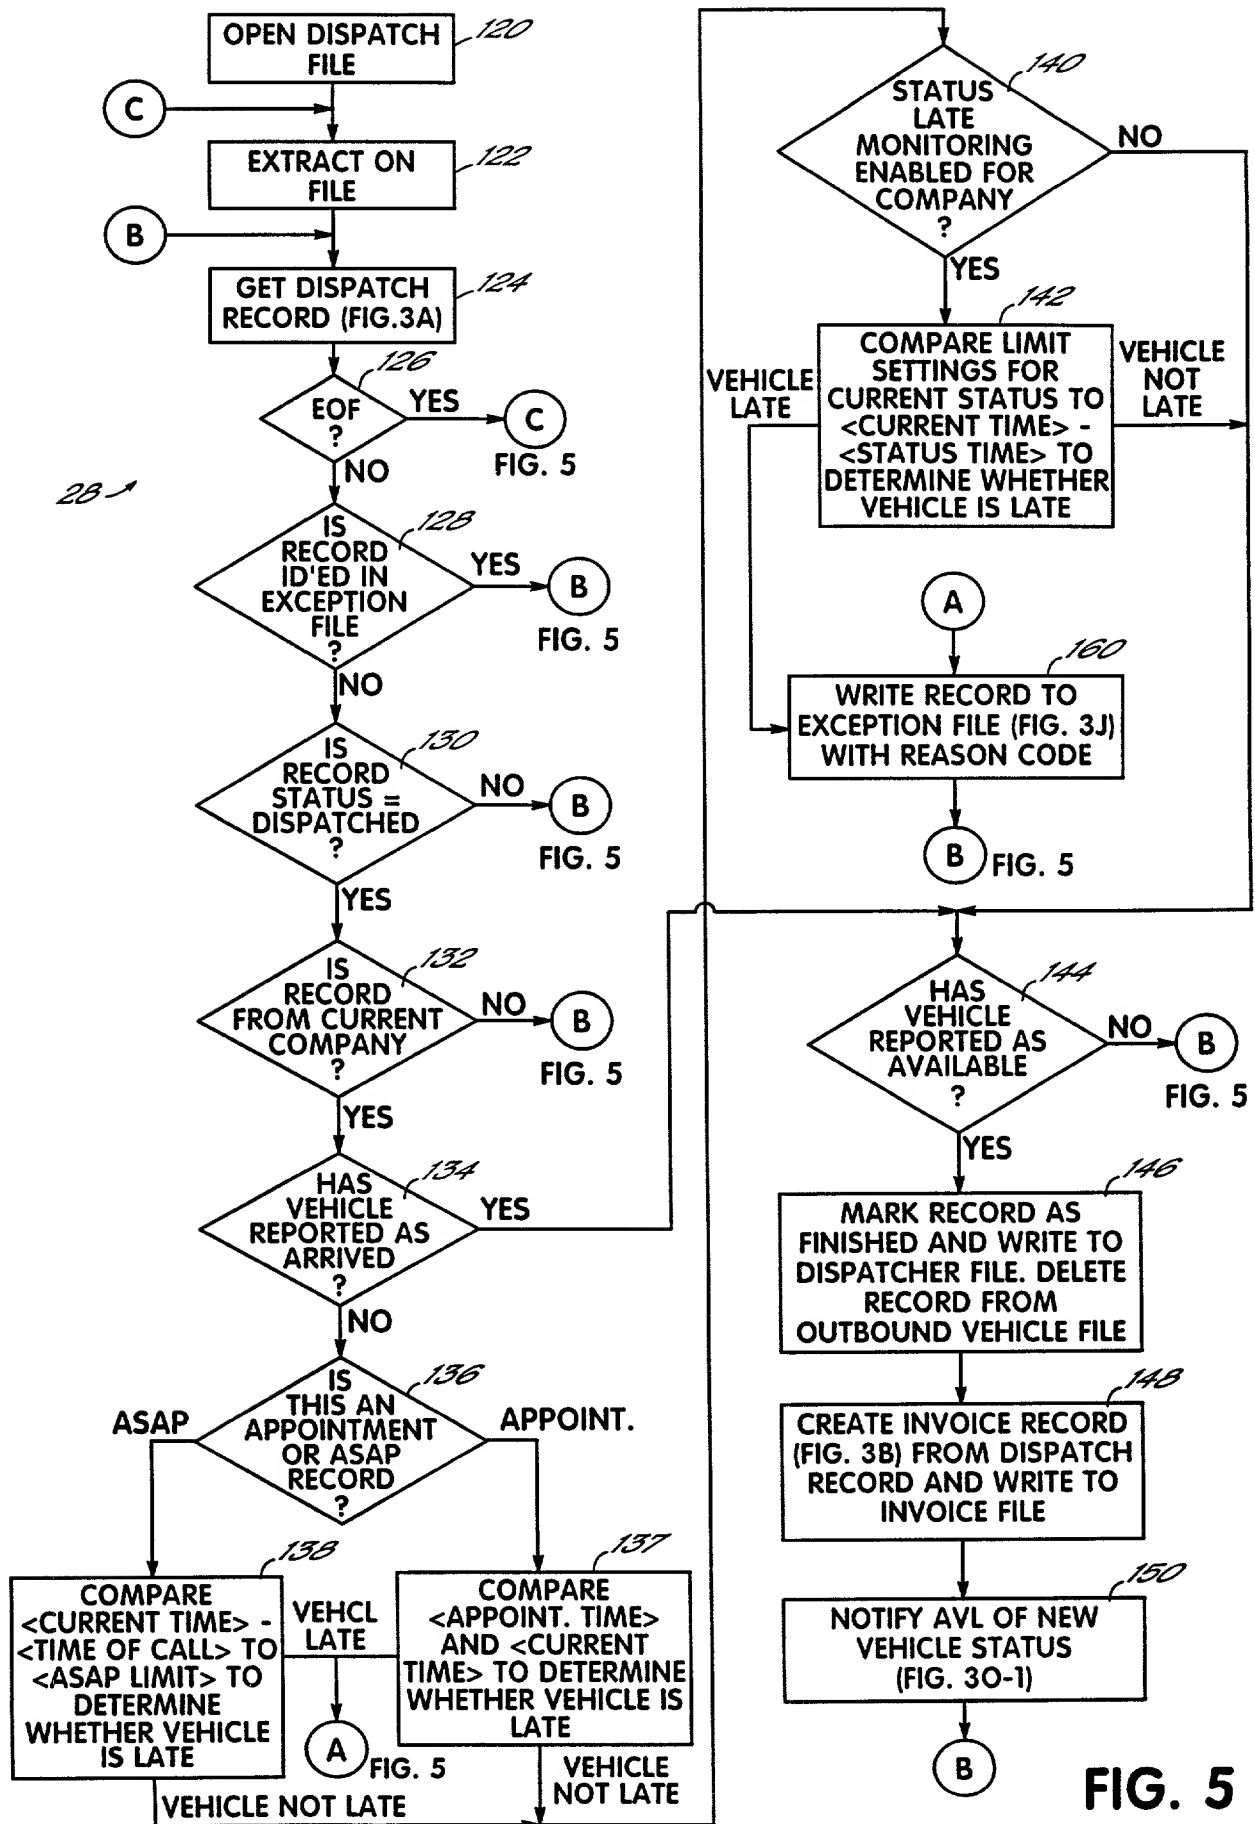
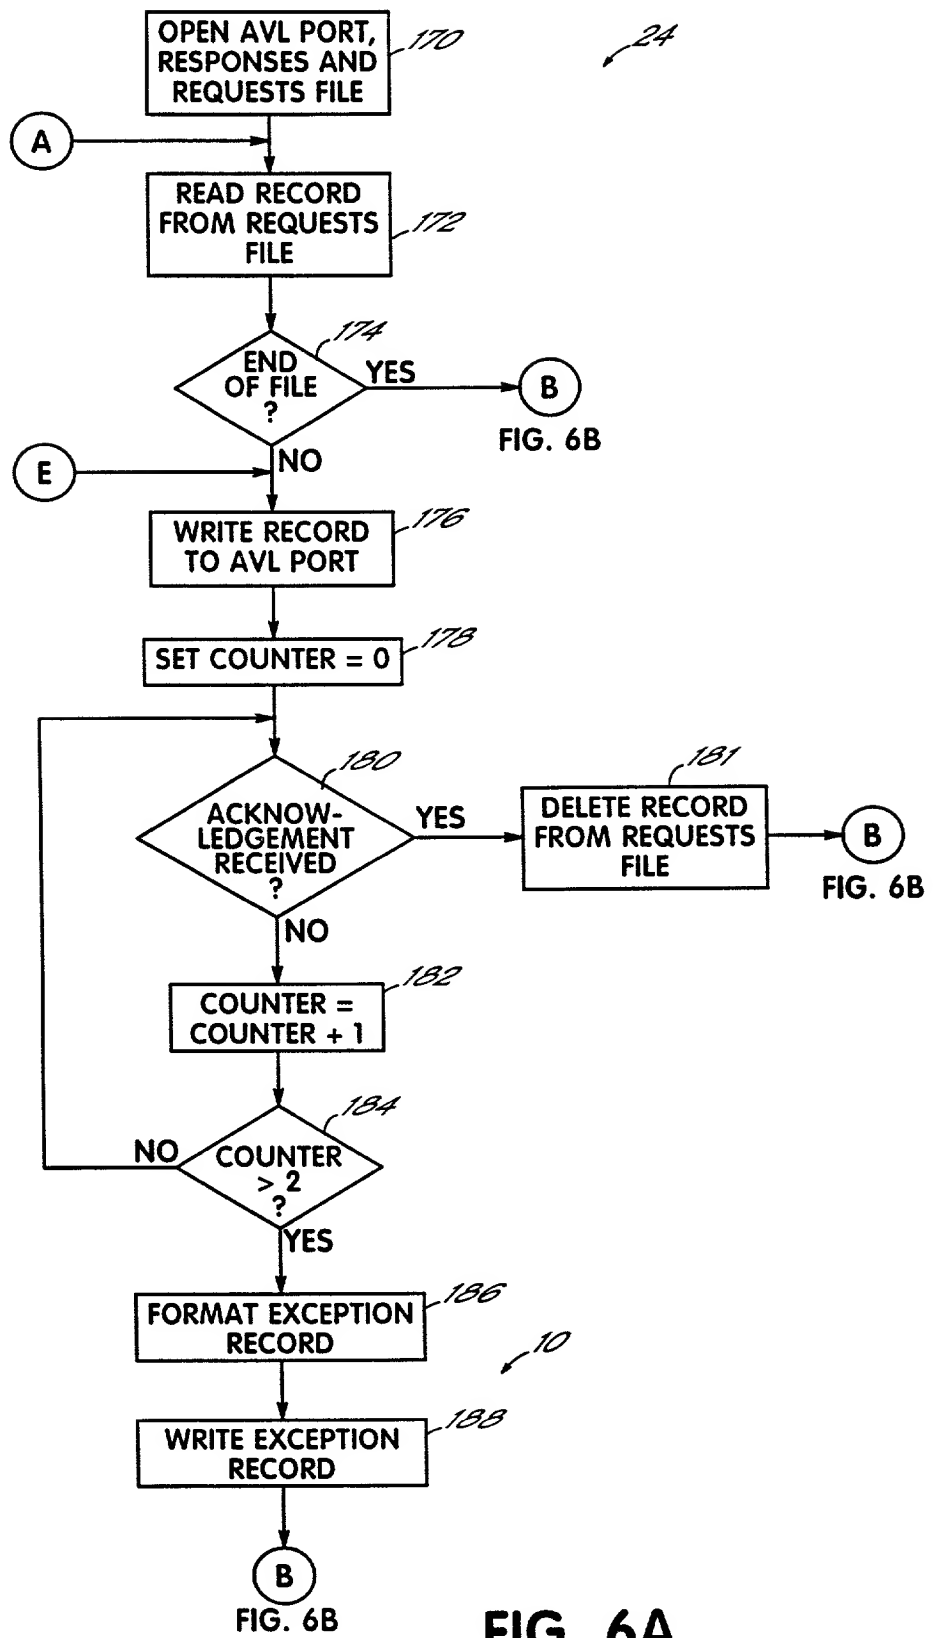


FIG. 5



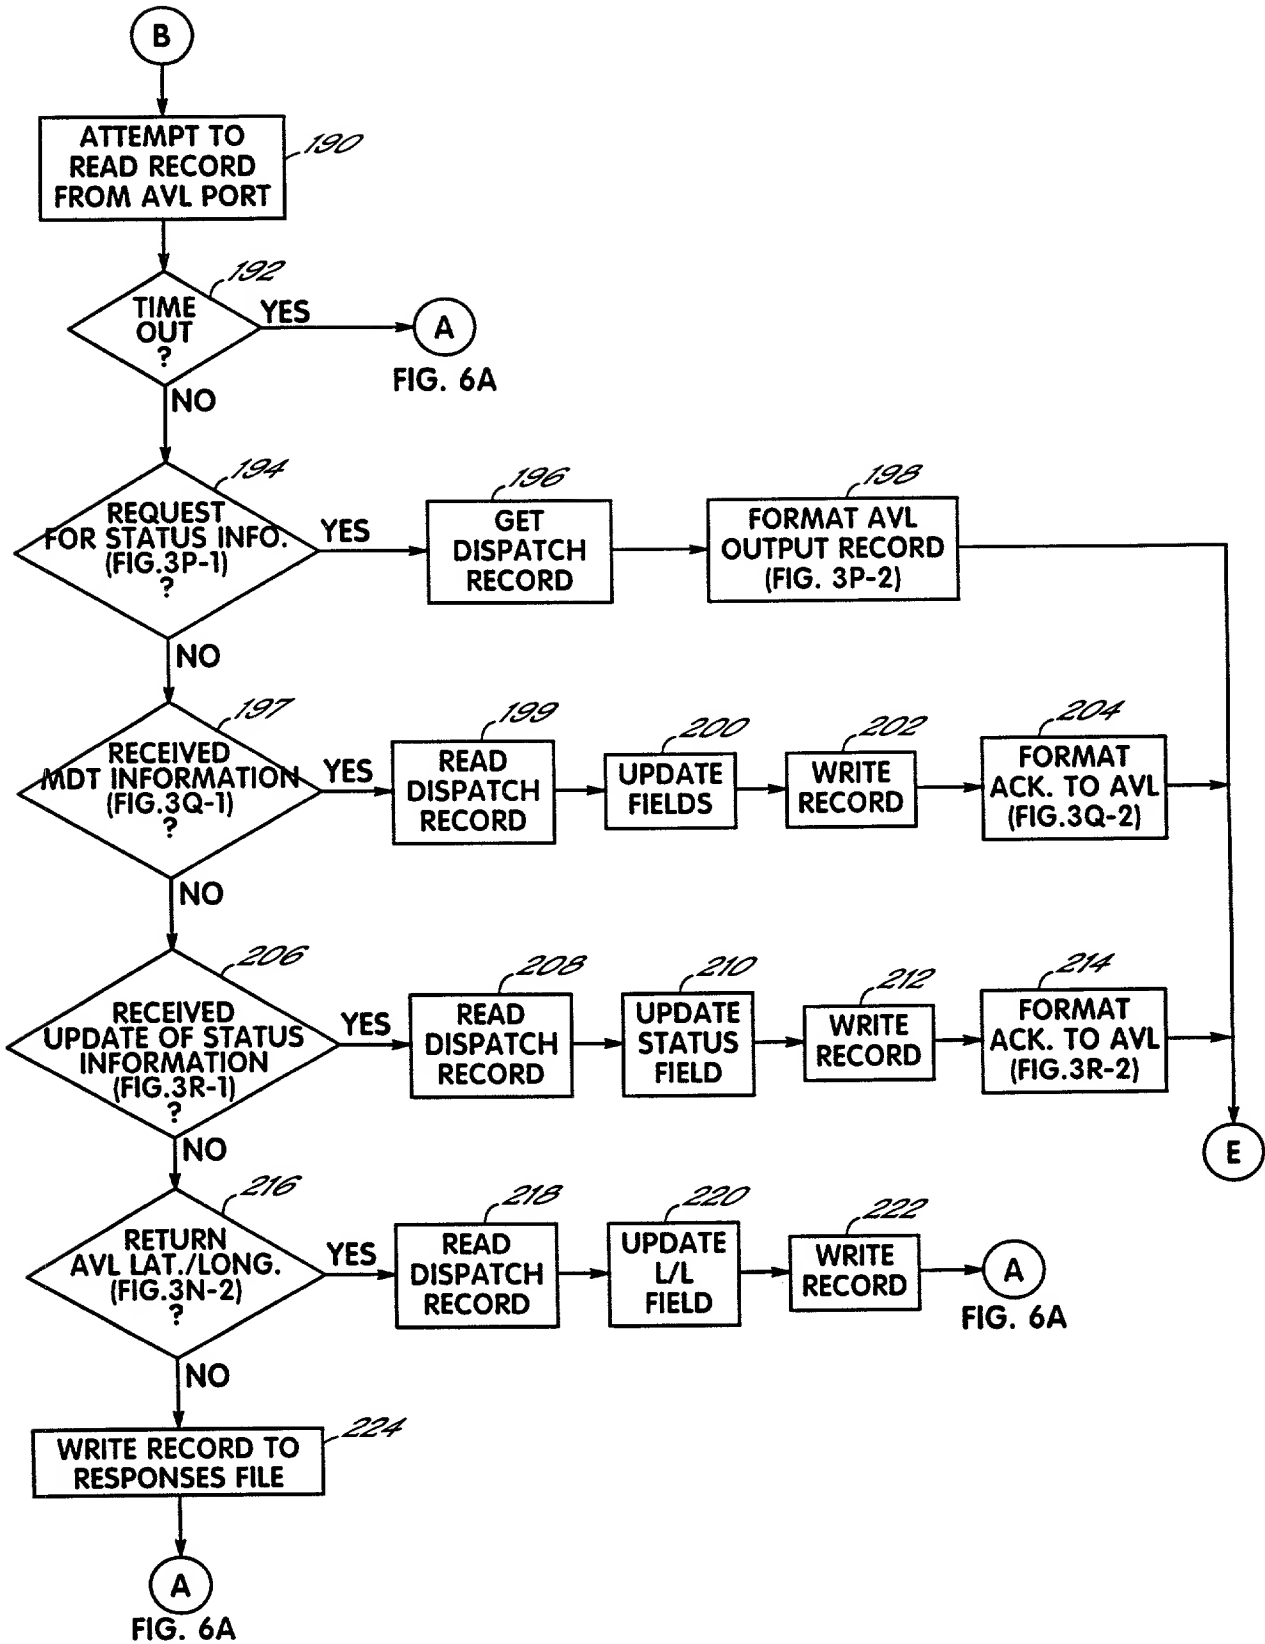


FIG. 6B

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: **FULLY AUTOMATED VEHICLE DISPATCHING,
MONITORING AND BILLING**

APPLICANT: **Chris Smith; Ken Edwards**

FULLY AUTOMATED VEHICLE DISPATCHING, MONITORING AND

BILLING

Abstract of the Disclosure

A system for controlling vehicles to provide transportation services without need for human intervention. A database stores records each documenting needed transportation services. Processing circuitry (which may be one or several networked computers) reviews these records, locates records indicating a need for immediate transportation service, and instructs vehicles to provide the service. The processing circuitry also monitors vehicle activities by reviewing the records, and automatically obtained vehicle activity information, to identify transportation services which are not being adequately provided, and refer these to human dispatchers for special attention. A variety of methods for obtaining and updating vehicle activity information are disclosed, as are various applications for the system.

FULLY AUTOMATED VEHICLE DISPATCHING, MONITORING AND

BILLING

Field of the Invention

5 The present invention relates to
dispatching or controlling of taxis, ambulances, or
other vehicles.

Background of the Invention

10 A number of systems have been devised for
dispatching of vehicles or other services upon
demand. The complexity of dispatching systems
ranges from fully manual systems to systems
employing elaborate computer databases and tracking
systems.

15 To dispatch vehicles accurately and in a
timely fashion, several things must be done
concurrently. Vehicles must be tracked so that
their location is known so that they may be
efficiently selected for future jobs. The position

and status of dispatched vehicles must be monitored to determine if they are on time or delayed.

Customer requests must be received and posted for dispatching, and then dispatched. Delayed arrivals should be identified and reported to the customer as soon as possible.

A fully manual dispatching system (such as is employed by smaller taxi companies), requires a single human being to perform all of the tasks identified above. More modern dispatching systems provide automation of some of the described tasks.

For example, various systems have been established to manage the reception and posting of customer requests. For example, the "Life-TRAK" system, available from the assignee of the present application, provides a database server storing a database of customer request records. New records are generated by call takers who receive incoming telephone calls from customers. Also, records may be generated at remote sites, for example by contract customers, and transmitted into the central database by telephone connections. The customer requests are then reported to dispatchers who determine when the requests are in need of service, and dispatch a vehicle as needed.

There are also commercially available systems for assisting the dispatching tasks described above. For example, there are commercially available Automatic Vehicle Locator (AVL) systems which automatically track (typically via satellite navigation) the locations of managed vehicles, so that this information can be reported to a dispatcher in textual or graphic form to assist the dispatcher determining the locations of vehicles. Typically, the dispatcher uses this information to select a vehicle for a particular job, and then forwards instructions to the driver to assign them the job. Often, the AVL includes data fields where the dispatcher may store an indication of the status of a vehicle (e.g., dispatched or available) and the vehicle's capabilities (e.g., wheelchair-compatible, etc.) so that this information can be used by the dispatcher in selecting a vehicle for a job and monitoring activity of the vehicles.

Advanced AVL systems further facilitate dispatching, by automatically identifying, upon request, the nearest vehicles to a given address or latitude/longitude position, to assist the dispatcher in selecting a vehicle for dispatch.

Furthermore, AVL systems may also include a street map database and search algorithm through which the AVL can identify a street route from one address to another upon request from the dispatcher.

5 In some cases, the dispatcher communicates with the vehicles via radio communication or cellular telephone connections. In other cases, the AVL system itself includes support for textual communication between dispatchers and the vehicles through mobile data terminals (MDT's) mounted in the vehicle, which typically make use of underlying cellular communication networks.

Summary of the Invention

15 Despite the high degree of automation that has been applied to vehicle dispatching, as described above, one common thread between fully manual dispatching and the most automated dispatching systems is their central reliance on human beings to make dispatching decisions and perform monitoring of vehicles once dispatched. 20 Unfortunately, it has been found that a primary source of errors, in even the most automated dispatching systems, is human error. For example, a dispatcher may misread customer job request and fail to dispatch it on time. Or the dispatcher may 25

forward a dispatch to a vehicle through a MDT but fail to follow up and ensure that the MDT message has been acknowledged by the vehicle driver and that the vehicle is en route, causing the vehicle to arrive late, or not at all. Or, in the case of taxi or ambulance/ambulette dispatching, the dispatcher may through inadvertence assign a taxi which is not wheelchair-equipped to a job which requires a wheelchair-equipped vehicle, or assign an ambulette (wheelchair ambulance) to a job which requires a stretcher ambulance, resulting in wasted time and/or delay for the customer. Or special instructions relating to the customer, route, or other items may fail to be forwarded to the vehicle.

It is the object of the present invention to overcome these shortcomings in known vehicle dispatching systems by providing a fully automated dispatching system which, at least under normal operating conditions, eliminates the human dispatcher from dispatching operations. The elimination of human errors of the kind described in the previous paragraph greatly improves the consistency of service provided to customers and improves the likelihood of repeat requests.

In one specific aspect, the invention features a system for controlling vehicles to provide transportation services without need for human intervention, including a database of records each documenting needed transportation services. 5 This database is reviewed by processing circuitry to locate records indicating a need for immediate transportation service, and then instruct vehicles to provide the vehicle service. In addition, the processing circuitry monitors the records after 10 dispatching, along with vehicle activity information, to identify transportation services which are not being adequately provided. The processing circuitry is in continuous automatic communication with the vehicles, forwarding 15 instructions to vehicles and obtaining vehicle activity information relating to each vehicle.

The processing circuitry may be a microcomputer running a multitasking operating system, a network of computers, or any other 20 arrangement of computing hardware, including an arrangement of computers spread geographically in a wide-area network. There may be multiple processes to dispatch and monitor vehicles, running

simultaneously on networked computers or in a multitasking operating system.

5 The vehicle communications may use ground-based radio communication, satellite-based radio communication, or both. In particular, satellite-based vehicle tracking circuitry may be used to track the locations of the vehicles, and the vehicle locations forwarded via satellite or radio to the processing circuitry for using in vehicle
10 monitoring.

The vehicle monitoring may evaluate the vehicle's movements and position to determine if it has arrived at or is en route to an appointed location. Alternatively, or in addition, the
15 vehicle operator may manually communicate the arrival of the vehicle at the appointed location.

Requests for vehicle service may be entered by call takers at the location of the database server, or may be entered remotely via
20 telephone, either at a data terminal at a customer site or via touch-tone telephone or at an ATM-like facility using a customer identification card.

When the automated dispatching and controlling system finds a task which is not being
25 adequately serviced, and cannot rectify the

situation, the system creates an exception records to refer this situation to a human dispatcher who then may take extraordinary action with respect to the situation.

5 The automated dispatching and controlling system not only collects vehicle appointment and activity information, but also collects billing information associated with requested transportation services, for example, in an ambulance environment,
10 the patient name, diagnosis, reason for transit, insurance information, etc. When a task is completed, this information is used to automatically, and without further human involvement, generate paper or electronic invoicing
15 for the services rendered.

 The system may also be used to monitor use of the vehicles, e.g., whether the vehicle is moving, the velocity of the vehicle, whether the vehicle is braking, fuel usage of the vehicle,
20 whether emergency signals of the vehicle are operating, and whether the engine is idling. This information can be used to determine, in a more detailed manner, the status of the vehicle, e.g., whether it is stalled in traffic, or whether the
25 vehicle is being used inappropriately. In either

case, an exception record can be generated to refer the situation to a human dispatcher.

5 The collection of information on current vehicle status and future appointments can be combined to provide continual, automated system status management, to determine and predict future needs for transportation services and compare the future needs to expected availability of transportation services. If this process identifies
10 future times at which available transportation services will not meet predicted needs, this situation can be referred to a human dispatcher ahead of time so that corrective action can be taken. Alternatively, or in addition, the system
15 may automatically instruct a vehicle to pre-position to a location where the vehicle will be better able to meet predicted future needs for transportation services, to minimize future delays.

20 An important feature of the automated dispatching system is that a dispatching process instruction to a vehicle identifies a route to be followed by the vehicle. This feature will be increasingly important in the future when governmental or insurance entities may begin to
25 demand particular routing, or at least identify

maximum mileages that will be reimbursed. By ensuring vehicles follow pre-defined routing, these requirements can be more easily met.

Indeed, it is expected that the ability to
5 automatically generate routes, and to automatically
provide them to vehicles, in accordance with the
present invention, will heighten awareness of
mileage charges and result in a demand for systems
to review mileage charges (no matter how generated)
10 and compare the mileage charges to the mileage for
an optimal routing. Such a system might be used by
an insurance or governmental agency to locate
excessive mileage charges, or used by a transit
company to pre-screen invoices before they are
15 rejected by an insurance or governmental agency.
Accordingly, the present invention encompasses
systems which make use of existing AVL technology to
compute routing and mileage based on invoiced pickup
and destination sites, and then compare the mileage
20 of the computed route to the mileage charged in the
invoice.

The above and other objects and advantages
of the present invention shall be made apparent from
the accompanying drawings and the description
25 thereof.

Brief Description of the Drawing

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and, together with a general description of the invention given above, and the detailed description of the embodiments given below, serve to explain the principles of the invention.

Fig. 1 is a functional block diagram of a fully automated vehicle dispatching, monitoring and billing system in accordance with principles of the present invention;

Fig. 2 is an illustration of the various data files stored by the server in Fig. 1 and manipulated by the automated dispatching, monitoring and billing system;

Figs. 3A, 3B, 3C, 3D, 3E, 3F, 3G, 3H, 3I, 3J and 3K are illustrations of the formats of the data files illustrated in Fig. 2;

Figs. 3K-1, 3K-2, 3L-1, 3L-2, 3M-1, 3M-2, 3N-1, 3N-2, 3O-1, 3O-2, 3P-1, 3P-2, 3Q-1, 3Q-2, 3R-1 and 3R-2 are illustrations of the automated dispatch messages and responses exchanged between the AVL system and automated Communications, Dispatching and Vehicle Monitoring processes illustrated in Fig. 1;

Figs. 4A and 4B are flow charts of the operations performed by a Dispatching process of Fig. 1;

5 Fig. 5 is a flow chart of the operations performed by a Vehicle Monitoring process of Fig. 1; and

Figs. 6A and 6B are flow charts of the operations performed by a Communications process of Fig. 1.

10 Detailed Description of Specific Embodiments

Referring to Fig. 1, a fully automated vehicle dispatching, monitoring and billing system in accordance with the principles of the present invention, includes several elements for automated dispatching and monitoring which have been discussed above in the background of this application. Specifically, the system includes a database server 10 for storing records indicating requested vehicle services and associated information. This database is created initially at one of two data entry sites 12, 14. Call takers 12 located at the dispatching facility (multiple call takers being illustrated in Fig. 1) receive telephone requests from customers such as customer 13 and, in response, generate request records in the database in several tests.

15
20
25

Contract customers 14 may also possess remote data entry terminals at which the customers may enter data into database server 10 over a telephone connection 15.

5 Incoming requests may also be accepted by various other methods; for example, remote facilities may enter information over a radio, or satellite, or Internet, or other communications links rather than telephones. Furthermore, requests
10 may be entered through touch tone dialing at a touch tone telephone in a manner analogous to that current used for telephone banking. Another alternative is that requests may be entered at remote kiosks similar to automated teller machines, using health
15 insurance or identification cards issued to customers.

The dispatching facility also includes a number of human dispatchers 16 who interact with data in the database 10 to dispatch vehicles.
20 Dispatchers 16 may interact with the database and server 10 and an AVL system 16 to perform dispatching of vehicles 20 in the same manner as is performed in known dispatching systems as discussed above. Particularly, dispatchers 16 may review
25 request records in database server 10, and in

response to these records interact with AVL system
18 to request vehicle location information and
routing information and to relay dispatching
commands and request status updates from vehicles
5 over wireless communication links 22.

In known dispatching systems described in
the background of this application, this kind of
interaction between database server 10 and AVL
system 18, using human dispatchers 16, is the
10 primary and only mode of operation. However, in
accordance with the principles of the present
invention, this human-based mode of dispatching is
used only in extraordinary circumstances. Under
normal circumstances, the interactions with database
15 server 10 and AVL system 18 are fully automated and
are performed by communications processes 24,
dispatching processes 26 and vehicle monitoring
processes 28, which automatically dispatch and
monitor vehicles in response to orders reflected in
20 records and database 10.

In accordance with this new and unique
model for dispatching of vehicles, dispatchers 16 do
not constantly interact with database server 10, AVL
system 18, and the vehicle drivers, but rather only
25 interact with the drivers and other systems when

extraordinary circumstances require human
intervention into the automatic dispatching provided
by processes 24, 26 and 28. This infrequent
interaction with the AVL system 18 and server 10 is
5 represented by dotted lines 17 and 19 between
dispatchers 16, AVL system 18 and database server
10.

Under normal circumstances, as will be
explored more fully below, dispatchers 16 have an
10 only supervisory and monitoring role. Dispatchers
may, for example, monitor vehicle activities and
dispatching to ensure the system is operating
properly and perhaps to override automatic
dispatching decisions which are obviously erroneous
15 or should be handled differently for policy reasons.
Furthermore, dispatchers might update vehicle status
information based using intelligence gained from
outside the automated dispatch system. However,
although dispatchers 16 they may perform various
20 monitoring of this kind and may occasionally
override automated dispatching, dispatchers 16 will
typically only become actively involved in a given
dispatching transaction when the automated
dispatching processes 24, 26 and 28 identify an
25 exception requiring human intervention and a

corresponding exception record is placed into
database server 10.

Exception records are immediately reviewed
by dispatchers 16, who may then interact with the
5 AVL system 18 to determine the location of the
vehicle, and/or may communicate with the driver
through the AVL system (in the manner described
below) or through a radio, cellular phone, pager, or
satellite communications to determine the cause of
10 the exception and resolve the exception.

The following figures and description
provide a detailed elaboration of the specific
operations of the communications processes 24,
dispatching processes 26 and vehicle monitoring
15 processes 28 to automate the previously manual,
human-based operations of the dispatchers 16 to
permit the dispatchers to focus on exceptional
situations.

As an initial matter, it will be
20 understood that the software for performing the
remaining tasks illustrated in Fig. 1, such as the
local and remote call taking and data entry,
dispatcher record monitoring, automated vehicle
location and vehicle communication, can be one of a
25 number of commercially available software packages

for vehicle dispatching, including, for example, the above-noted "Life-TRAK" software which is particularly suited for dispatching of ambulances. The file formats and software flowcharts described in detail below are particularly suited for incorporation into the existing commercially-available "Life-TRAK" system which is available from the assignee of this patent application.

The software used in "Life-TRAK", and the additional software components described below, are preferably written in a source code language providing easy transport between computing platforms. One particularly suitable source code language is BBx Business Basic, sold by Basis International of Albuquerque, New Mexico. This language provides portability of source code between any one of (a) a PC/DOS/Windows/Windows95 standalone or Novell Netware server environment using BBx for DOS/Novell; (b) a Unix network using serial terminals using BBx for Unix (SCO/AIX/Etc.); (c) a Windows for Workgroups environment with or without a Windows NT server using BBx for Windows for Workgroups. Furthermore, using the BBx TCP Data Server software, any or all of the above can be connected in a wide-area or Internet network.

Suitable Automatic Vehicle Locator systems can be purchased from various vendors including DCS, Inc., Teletrak, American TriTech, and EAI; these AVL systems either include low-level communications protocols of the kind illustrated below in Figs. 3K-1 to 3R-2 or will revise their AVL systems to support such communications.

It should be noted that a system other than the AVL may be used to support the communications between the dispatching systems and the AVL; for example, there are presently being introduced satellite paging-response systems which permit two way communications between mobile pagers and a central office via direct satellite communications. These systems could be used to transmit and receive the information discussed below in Figs. 3K-1 to 3R-2.

It is contemplated that a given automated dispatching system may include multiple communications processes 24, dispatching processes 26 and vehicle monitoring processes 28, running independently in networked computing systems. Thus, Fig. 1 illustrates a multiplicity of each process active in the automated dispatching system. The source language used for programming this system

must include facilities for locking individual
database records for a multiprocessing environment
-- such record locking is provided by the BBx
Business Basic language described above. In the
5 following discussion, the flow charts and operations
of each of the communications, dispatching and
vehicle monitoring processes will be elaborated with
an understanding that multiple processes may be in
simultaneous operation at any given time and
10 processing dispatching records in server 10
simultaneously. It will also be understood that
human dispatchers 16, because they are freed from
most dispatching tasks, will monitor the overall
operation of the automated dispatching system and
15 determine whether a "bottleneck" has occurred at any
of the communications, dispatching or vehicle
monitoring phases of operations, and if so may
initiate additional ones of processes 24, 26 or 28,
respectively, to provide added computing time to the
20 task which is experiencing a bottleneck.

It is further contemplated that various
aspects of the automated dispatching system may be
separated physically from one another; so, for
example, database server 10 may be at a
25 geographically central location whereas AVL systems

and computing systems running processes 24, 26 and
28 may be remotely located and communicating with
database server 10 over a wide-area or Internet
network through the above-described communications
5 facilities. Other possible combinations of physical
locations of the various components illustrated in
Fig. 1 are contemplated and within the scope of the
present invention.

It will be further appreciated that manual
10 dispatching (such as that which is facilitated by
the above-noted "Life-TRAK" system) may be performed
in one area using server 10 while automated
dispatching is performed in another area. Or,
manual and automated dispatching may be performed
15 simultaneously at the same area, or finally
automated dispatching may be halted and all
dispatching performed manually by dispatchers 16.

Now turning to Fig. 2, the various data
files used by automated dispatch processes 24, 26
20 and 28 to perform automated dispatching of vehicles
20 can be elaborated. The dispatch file 30 is the
primary file used by the automated dispatch
processes to store information regarding a job and
the status of a vehicle assigned to a job and to

interact with other processes in the dispatching system.

5 The exceptions file 32 contains pointers to the records in the dispatch file which cannot be handled by the automated dispatching processes 24, 26 and 28, and must be managed by human dispatchers 16, as well as an indication of the reasons for why the dispatch record requires human intervention. Software controlled by human dispatchers 16 reviews 10 the exceptions file 32 to locate dispatch records requiring human intervention, so that the dispatcher 16 may evaluate the reasons for the exception and eliminate the problems encountered during automated dispatching. Once this is done, the human 15 dispatcher may re-initiate automated dispatching and monitoring for that record.

Invoice file 34 contains information for generating an invoice for the activities performed by vehicles 20 upon customer request. Invoice files 20 34 contain detailed information used to generate detailed invoices of the kind needed, for example, for federal and state Medicare and Medicaid agencies. As will be noted in detail below, the automated dispatching system has as a primary 25 feature the automated collection of invoicing

information so that this information is readily available for generation of invoices without further human involvement.

Vehicle file 36 and employee file 38 are
5 used to search and identify particular vehicle jobs and particular vehicle operators, as discussed below.

Employee pager file 40 and pager service file 42 are used to page vehicle operators to alert
10 the operators of new dispatching commands being transmitted to the vehicle.

Automated dispatching requests file 44 and automated dispatching responses file 46 are used by communications process 24 to record and maintain
15 communications between database server 10 and AVL system 18 in order to facilitate dispatching and vehicle monitoring operations being performed by dispatching process 26 and vehicle monitoring process 28.

Automated dispatch setup file 48 and status limit file 49 are used by dispatching process
20 26 and vehicle monitoring process 28 to determine the desired behavior of these processes during dispatching and monitoring of vehicles, as
25 elaborated below.

Figs. 3A through 3R-2 illustrate specific file and data communications formats used in one embodiment of the present invention to generate and update the files illustrated generally in Fig. 2.

5 Specifically, Fig. 3A illustrates the format of records in dispatch file 30. Fig. 3B illustrates the format of records in invoice file 34. Fig. 3C illustrates the format of records in outbound vehicle file 36. Fig. 3D illustrates the format of
10 records in employee file 38. Fig. 3E illustrates the format of records in employee pager file 40. Fig. 3F illustrates the format of records in pager service file 42.

Fig. 3G illustrates the format of records
15 in automated dispatch requests file 44. Each of these records includes a message packet key code, and a unique record identifier. The message packet key code indicates the particular type of message that follows, e.g., a closest vehicle request (Fig.
20 3K-1) has a record key code of 01, and a route request (Fig. 3L-1) has a record key code of 10, etc. The record identifier is used to distinguish each record from other records of the same type which may be found from time to time in the requests
25 file 44. The record identifier is generated from a

combination of the ID number of the terminal (or
process identifier of the process) generating the
request, and transport ID number (which uniquely
identifies the dispatch record for which the request
5 is made) and a unique sequence number generated by
the process 26 or 28 which generated the request.
The key code and record identifier are followed by a
message packet which can take one of a variety of
formats. The specific formats, and their purposes,
10 are illustrated in Figs. 3K-1, 3L-1, 3M-1, 3N-1, 3O-
1, 3P-1, 3Q-1 and 3R-1, and will be elaborated
below.

Fig. 3H illustrates the format of records
in automated dispatch responses file 46, which are
15 similar in general form to the requests in file 44.
Each automated dispatch response record includes a
message packet key code and record identifier,
followed by the message packet which may take one of
a variety of formats. The formats of the message
20 packets that may be included in an automated
dispatch response record are shown in Figs. 3K-2,
3L-2, 3M-2, 3N-2, 3O-2, 3P-2, 3Q-2 and 3R-2, and
will be discussed below.

Fig. 3I illustrates the format of records
25 in automated dispatch setup file 48. Fig. 3J

illustrates the format of records in the exceptions
file 32. and Fig. 3K illustrates the format of
records in the status limit file 49.

5 The use of the files illustrated in 3A -
3R-2 will be illustrated in further detail below in
connection with Figs. 4A - 6B. Initially, it should
be noted that dispatch file records are generated by
data entry call takers 12 or remote data entry
terminals 14, as part of requesting a vehicle
10 service. When the data entry person at a terminal
12 or 14 creates the dispatch record, the terminal
or server through which the person 12 or 14 is
interacting generates a dispatch record of the
format shown in Fig. 3A, and stores this record into
15 database server 10.

 When a dispatch record is created, the
data entry person indicates the customer for whom
the services have been requested. This information
is used to create the transport ID number, which is
20 the first field of the dispatch record. The
transport ID number is created by retrieving a code
for the customer and appending to this code a
sequential number. Accordingly, all of the dispatch
records for a given company will have the same
25 initial digits in their transport ID numbers. This

is significant because the dispatch file 30 is
sorted in accordance with transport ID numbers by
database server 10, such that those records for a
given company will appear sequentially within
5 dispatch file 30 and exception file 32.

When a dispatch record is initially
created by a data entry person 12 or 14, the status
flag field of the dispatch record is set to a " "
character indicating that the dispatch job is
10 prescheduled, i.e., has not yet been dispatched but
has been requested.

The data entry person 12 or 14 also enters
the required date of service and appointment time at
which vehicle service is desired. This information
15 is stored respectively in the third and fourth field
of the dispatch file record. The appointment time
may be entered in military time format, or, if
service is requested immediately (such as is the
case with "911" ambulance service), the appointment
20 time may be entered as "ASAP", indicating that
pickup is desired as soon as possible.

Where a particular appointment time has
been identified, the data entry person 12 or 14 may
indicate a lead time for the appointment, which is a
25 request that the vehicle be allotted additional time

to arrive at the pickup location as compared to the ordinary dispatch. A lead time might be entered where the pickup location is an unusual distance away from the normal service area, and so additional time will be required to reach the pickup location. The data entry person 12 or 14 may enter the lead time, or alternatively, database server 10 or the software at data entry terminals operated by call takers 12 or remote data entry persons 14 may generate an estimate for the lead time, based on the pickup address, and store this in the dispatch file record. In either case, the lead time is stored in the fifth field of the dispatch file record.

The pickup and destination addresses and their latitudes and longitudes are indicated in the tenth through fifteenth fields of the data record.

Pickup and destination sites may be coded by the system so that, for example, frequent pickup sites such as hospitals are identified by entering a brief code, which automatically generates the corresponding address, latitude and longitude, and, if a pickup, an appropriate lead time (if any). This functionality would require an additional file (not shown) of pre-stored addresses, latitudes and

longitudes, and lead times, indexed by codes that may be entered by a data entry person 12 or 14.

The data entry person 12 or 14 also identifies particular information for the transport service. Specifically, the type of transport is indicated in the sixth field. The transport type may indicate any special requirements for the transport, depending upon the particular application. In the case of ambulance dispatch services, the transport type may indicate wheelchair or advanced life support, respectively indicating that an ambulette (a wheelchair-configured ambulance) can be used, or that an ambulance equipped for advanced life support is required.

For ambulance service in particular, it is useful to fill out other fields at the time the dispatch record is created by a data entry person, such as the reasons for the transport (fields 24-27), a patient ID number for indexing patient-specific information from a patient information file (not shown), the name of the caller or customer who requested the transport (field 29), the contract number if a contract customer is requesting the services (field 30), and codes for accessing additional files for billing information, such as

the base rate, mileage rate, extra services rate,
and billing address. This detailed billing
information is particularly useful in an ambulance
dispatching environment due to the level of detailed
5 invoicing needed to satisfy health insurance and
Medicare/Medicaid requirements to obtain
reimbursement. By incorporating this information
into a dispatching record at initiation, this
information can be readily moved into an invoicing
10 record after the task is completed and used for
accurate and rapid billing for services without
further human involvement.

The dispatch record also includes a number
of fields (fields 16-23) for tracking the vehicle
15 activity. These fields are filled out as the
vehicle performs the desired task. This information
is also extremely important for customer invoicing
due to insurance and Government requirements, and
therefore is also transferred to invoice records
20 upon completion of the task. To start the process
of collecting data for later use, at the time the
dispatch record is initially created, the time of
the call is recorded in field 16 of the dispatch
record.

It should be noted that the dispatch file format can be used readily to schedule vehicle services hours or days, or even weeks or months in advance but also to request vehicle services on an immediate basis. For example, to request services at a future date, the data entry person 12 or 14 need only put in the desired date of service into the third field of the record. To request services at a given time on today's date, the data entry person need only put in today's date of service in the third field and the desired appointment time in the fourth field. Finally, the data entry person 12 or customer 14 may request immediate ambulance service on an as soon as possible basis, by entering "ASAP" as the appointment time.

Once a data entry person 12 or 14 creates a dispatch record as described above, the automated dispatch processes 24, 26 and 28 will automatically cause a vehicle to be dispatched in accordance with the parameters set forth in the dispatch record, and will ensure that the vehicle arrives at pickup location approximately at the appointment time and arrives at the destination. As these events occur, the automated dispatch processes 24, 26 and 28 fill out fields 16-23 of the dispatch record to indicate

44-38861-10000

the time that the crew of the vehicle was notified,
the time that they were dispatched with the specific
instructions, the time that they responded and
indicated that they were en route, the time that
5 they arrived at the pickup site or scene, the time
that they were en route to the destination, the time
that they arrived at the destination, the time that
they completed their task and reported themselves as
available. In addition, the automated dispatch
10 processes 24, 26 and 28 will fill in the vehicle
identification number and the driver and attendant
employee numbers in the fields 7-9 of the dispatch
record. As a result, all of this information is
available to generate detailed invoices for delivery
15 to the customer of sufficient detail to satisfy
federal and state Medicare and Medicaid authorities.

It will be noted that the dispatch
records, which accumulate over time, include
sufficient information to collectively determine the
20 movements of each vehicle throughout each business
day. Accordingly, these records can be collectively
analyzed to determine the extent to which vehicles
are being properly utilized and to potentially
develop and revise marketing and vehicle positioning
25 strategies for optimizing performance. Furthermore,

these records may be used to generate detailed reports of nearly every format indicating the utilization of a particular vehicle, the on-time performance of a particular driver or crew, and any other kind of reporting information that management may seek in order to understand and improve operation of the dispatching operation. The analyses available through dispatching record are substantially more detailed and comprehensive than those that are supplied by AVL systems, since the AVL system can only rely on stored records of vehicle movements and cannot couple these to records of customer requests and response times, customer characteristics, and all of the other information available in dispatch files.

It should also be noted that, in accordance with the invention, a single database server contains both the information on current vehicle positions and status, and information on future appointments for vehicle use. Because this information is collected in a single server, for the first time it is possible to perform status management procedures, to predict future needs for vehicles and prepare for those needs, by combining the present vehicle position and status information

with known and predicted future appointments. A process performing a regular analysis of this kind can be extremely useful in predicting future bottlenecks in service and notifying human managers ahead of time, so that, for example, the human managers may bring in additional vehicles and crews, on overtime if needed, to avoid delays. Furthermore, the status management process might identify a need for an additional vehicle in a particular position and pre-dispatch the vehicle to a hold position where the vehicle will be more readily available to service future tasks.

Another file worthy of initial comment is the outbound vehicle file 36, the format of which is illustrated in Fig. 3C. This file is automatically updated with records by the automated dispatch processes 24, 26 and 28 whenever a vehicle is assigned to a given task. The records in this file indicate simply the vehicle's ID number and the transport ID number for the transport task to which the vehicle has been assigned. This file can then be used to identify, for a given vehicle, all of the transport tasks that have been completed by or are assigned to the vehicle. This can be useful in evaluating whether a given vehicle is available, or

alternatively in evaluating the amount of work that has been done by a given vehicle and the paths followed by the vehicle during a given day.

Another file of note is the employee file 38, the format of which is seen in Fig. 3D. This file contains records, each of which indicates the ID number and the employee's name. This file is useful for displaying employee names when a dispatcher 16 must handle an exception condition which has been identified by the automated dispatch. Furthermore, this file may be used when generating invoices to indicate employee's names rather than their ID numbers.

The automated dispatch setup file 48, records of which are illustrated in Fig. 3I, indicates setup parameters for the automatic dispatch processes 24, 26 and 28 on a company-by-company basis. The use of this file permits the automated dispatch system to provide different performance or different behaviors for different companies who request vehicle services from the automated dispatching system. Each record includes the company code of the company for the settings in the record. And the second field includes a dispatch advanced action setting, which is a time in

minutes that the automatic dispatch system uses to determine when a vehicle should be dispatched for an appointment, as discussed below in connection with Fig. 5. The third field of the setup file records is a flag to indicate whether the automated dispatch system should monitor vehicle status updates to determine if a vehicle status update is late in being received, as discussed below in connection with Fig. 5. Finally, the fourth and fifth fields of the setup records indicate the specific AVL operating system and AVL port locking file, for the automatic vehicle locating system being used for the particular customer. This permits different automatic vehicle locating systems to be used for different customers, and potentially allows different fleets of vehicles to be dispatched with a single automated dispatching site through the use of different AVL systems and/or different AVL access ports.

The exception file illustrated in Fig. 3J includes, as noted below, the transport ID numbers for dispatch records which have been marked for human intervention, along with codes indicating the reasons that the records were marked for human intervention.

The status limit file shown in Fig. 3K includes fields used to customize the performance of the automated dispatching system for a given customer. Most importantly, this file indicates the time limits for which a vehicle may remain at a given status during performance of an automatically dispatched task. The use of these fields will be discussed below. Also, this file may contain fields (not shown) indicating particular codes or keywords used by dispatcher as a shorthand for a vehicle status conditions (e.g., "vehicle is 20" meaning the vehicle is en route to the pickup), so that different codes or keywords may be used in screen displays and in communications for different fleets of vehicles.

Now turning to the detailed functions of the automatic dispatching processes 24, 26 and 28, Fig. 4A is an illustration of the dispatching processes 26. At the beginning of this process, the dispatch file 30 is opened 50 to permit evaluation of dispatch requests added to the dispatch file by call takers 12 or 14. Next, the dispatching process 26 extracts 52 individual records such as that shown in Fig. 3A from the dispatch file.

The records from the dispatch file are processed sequentially in a loop beginning with step 54, at which a dispatch record is obtained from the results of the extracting step 52. This loop
5 includes a sequence of steps illustrated in the remainder of Fig. 4A.

First, dispatching process 26 determines 56 if it has reached the end of the dispatch file. If the dispatcher has reached the end of the
10 dispatch file, it returns to step 52 to re-extract records from the dispatch file and begin again at the beginning of the file. If the dispatching process 26 has not reached the end of the dispatch file, it proceeds to step 58 to determine whether
15 the currently selected record is identified by the exception file 32 (this involves looking through the records {Fig. 3J} in the exception file 32 to locate any records having the same transport ID number as the current dispatch record). If the currently
20 selected record is identified by the exception file 32, this indicates that there has been an unrecoverable error during automatic dispatching and monitoring of this record, and therefore it has been referred to human dispatchers 16 for handling.

25 Therefore, if the current record is in the exception

file, the dispatching process returns to step 54 to get a new dispatching record.

5 If the dispatching record is not in the exception file, dispatching process 26 continues to step 60 and determines the status of the dispatch record by checking the second field of the record as shown in Fig. 3A. If the record has the status "prescheduled", indicated by a " " in the second field of the record, this indicates that the
10 transportation task described by the record has yet to be dispatched. In this case, the dispatching process 26 continues to step 62 to determine whether the record should be dispatched at the present time. If the record is not prescheduled, then as
15 illustrated in Fig. 3A, the record has either been dispatched or it has been cancelled or the job has been completely finished. In any of these cases, the record is no longer in need of dispatching, and therefore dispatching process 26 returns to step 54
20 to get a new dispatch record.

If a prescheduled record has been located which is not in the exception file, then the dispatching process 26 continues to step 62 at which it determines which company or customer the record
25 relates to.

Each dispatching process 26 is associated with a particular company or client and performs only dispatching for this one company or client and ignores any dispatching records in dispatch file 30 which relate to other companies or clients. The dispatching process 26 determines the company or client for which it is responsible from an automated dispatch setup file 48 which, as noted above with respect to Fig. 3I, indicates a company code that the automated dispatch processes are to operate upon.

Thus, in step 62, dispatching process 26 determines whether the currently selected record is for the current company. If not, the dispatching process skips the current record and will not dispatch it, and returns to step 54.

If the dispatching process 26 locates a record which is not in the exception file, is prescheduled, and is for the current company, then it determines if the job represented by the dispatch record should be initiated. If the dispatch record is marked "ASAP" in the fourth field, then the job should be dispatched immediately and the dispatching process 26 proceeds directly to step 66. Otherwise, the dispatching process determines if the time has

arrived to schedule the job. This is determined by comparing the current time to (a) the appointment time indicated in the fourth field of the dispatch record, (b) the lead time indicated in the fifth field of the dispatch record, and (c) the advance action time indicated in the second field of the setup file record for the current company as seen in Fig. 3I. If the appointment time, minus the lead time, minus the advance action time, is earlier than the current time, this indicates that the job should be initiated and a vehicle should be dispatched to meet the appointment, and the dispatching process proceeds to step 66. If not, the dispatching process skips the record by returning to step 54.

If the current dispatch record is to be dispatched by the dispatching process 26 as determined in step 64, the dispatching process proceeds to step 66 and requests from the AVL system 18 a list of the N closest vehicles which are capable of handling the job. This is done by adding a automated dispatch request to the automated dispatch requests file 44, using the format shown generally in Fig. 3H and specifically in Fig. 3K-1.

To generate the request shown in Fig. 3K-1, dispatch process 26 uses the transport ID number

and the terminal number displaying the results of
the dispatch process 26, or the processor number
running the dispatch process 26, to generate a
record ID as shown in Fig. 3K-1. The record ID is
5 made unique by appending a three digit sequence
number to the transport number and terminal number.
In addition, dispatching process 26 extracts the
transport type identified in the sixth field of the
current dispatch record (see Fig. 3A) and places
10 this transport type into the automated dispatch
request in the third field, as shown in Fig. 3K-1.
In addition, the dispatching process 26 retrieves
the pickup address location from the tenth field of
the dispatch record (Fig. 3A) and inserts this
15 address information into the fourth, fifth, sixth
and seventh fields of the automated dispatch request
message shown in Fig. 3K-1. Finally, the
dispatching process 26 identifies the number N of
vehicles to be identified by the AVL system 18 in
20 response to the request and inserts this number in
the eighth field of the automated dispatch request
as shown in Fig. 3K-1. For error correction
purposes, a cyclic redundancy code (CRC) is added to
the end of the automated dispatching request as
25 shown at the end of Fig. 3K-1.

After placing the appropriately formatted request in the automated dispatch requests file 44, dispatching process 26 waits for a response to appear in the automated dispatch responses file 46.

5 (The mechanism for delivering the request to the AVL system 18, obtaining a response from AVL system 18, and placing this response in the automatic dispatch responses file 46, will be discussed below with reference to Figs. 6A and 6B. For the purposes of
10 Fig. 4A, this operation is completed in background and a response can be found in automated dispatch responses file 46 after a sufficient period of time.) When a response is found in automated dispatch responses file 46 (step 68), dispatching
15 process 26 proceeds to step 70 to evaluate the response received. (The response is deleted from the responses file once it has been read in step 68.)

In step 70, dispatching process 26 scans
20 the particular vehicles identified by the AVL response to locate a vehicle which is currently available. This is done by using the vehicle identification numbers returned from the AVL system to look for a record in the outbound vehicle file
25 36. If a record for the vehicle is found in the

outbound vehicle file, then the vehicle is not available and the dispatching process must check another vehicle.

5 If, after evaluating all of the vehicles identified by the AVL, no available vehicles are located, the dispatching process is unable to automatically dispatch the current job and must request human intervention. In this case, the dispatching process proceeds to step 80 at which it
10 writes the an exception record to the exception file (Fig. 3J), indicating the transport ID number of the current dispatch record and a reason code indicating that the automated dispatching failed because of the absence of an available vehicle. Subsequently, a
15 human dispatcher 16 will evaluate the dispatch record and take the appropriate action, for example, calling individual vehicles to ensure that they have in fact not completed their current assignments, or, calling the customer who requested the job to inform
20 them that a vehicle will be dispatched late for the pickup. After writing a record to an exception file in step 80, dispatching process 26 moves on to the next record in the dispatch file by proceeding to step 54.

1
4

If an available vehicle is located in step 70, dispatching process 26 proceeds to step 72 at which it updates the current dispatch record by inserting the identification of the current vehicle and the identification of the crew (i.e., driver and attendant). This information is inserted into the seventh through ninth fields of the dispatch record. Second, the dispatch record is marked as dispatched by storing a "D" into the second field of the record. Third, the dispatching process stores the current time in the seventeenth field of the dispatching record to indicate when the crew was notified of the assignment. Finally, dispatching process 26 updates the outbound vehicle file record for the selected vehicle to associate the vehicle with the transport ID number of the current dispatch record, for later reference.

5
10
15

Next, the dispatching process 26 proceeds to step 74, at which it prepares to notify the crew of the new assignment. To do so, the dispatching process 26 pages the driver, by using the driver's mobile pager to inform the driver that a new job has been assigned to him. Initially, the dispatching process 26 creates data to be transmitted to the pager, which may include a simple code to indicate

20
25

that a new job has been assigned to the driver, or
may include more involved data including the pickup
location and/or the appointment time. The amount of
data to be transmitted to the pager is determined
5 from the kind of paging system in use. When a
simple telephone-number-only pager system is used, a
simple code is transmitted, whereas when a full text
pager is used, more information may be transmitted.
A voice-mail pager might also be used, in which case
10 a voiced message would be delivered by the pager.

To transmit the page, the dispatching
process 26 initiates a loop in which it repeatedly
attempts to transmit the page to the paging service.
This loop is repeated a given number, for example,
15 three times to permit ample opportunity for the page
to be accurately transmitted to the paging service.
The number of retries for paging, and for other
activities discussed below, may be hard-coded into
the software or may be stored as a parameter in
20 setup file 48. For the purposes of the following
discussion, it will be assumed that the number or
retries is three, regardless of how this value is
determined by the software.

A page counter is initialized in step 74
25 to count the number of repetitions in this loop. In

step 76, (now referring to Fig. 4B) this pager counter is incremented. In step 78, dispatching process 26 determines if the counter has exceeded the maximum number permitted. If the counter has exceeded the maximum number the dispatching process proceeds to step 80 (Fig. 4A) to write a record to the exception file indicating the transport ID number of the current dispatch record, and a reason code indicating that the unrecoverable error was due to a failure to communicate a page to the paging service.

However, if the dispatching process has not already paged the driver three times, it proceeds to page the driver by referencing the employee pager file shown in Fig. 3E to determine the pager service and personal identification number and telephone number used to page the employee who is identified as the driver in field 8 of the dispatch record. The pager service associated with the employee in Fig. 3E is then used to select a record from the pager service file 42 corresponding to the pager service to which the employee subscribes. The dispatching process 26 then reads from the pager service file the pager service modem number, the login ID, password, baud rate, word

length, stop bits and modem script that can be used to access the employee's pager service. This information is then used to control a modem to dial the employee's pager service and transmit a message to the pager service indicating that the employee should be paged and notified of the new job assigned to the employee.

If the paging operation is successful, this is determined in step 82 and processing proceeds to step 84 to begin generation and delivery of a route. However, if the paging operation fails for one reason or another, for example, because a modem has failed, or because the line at the pager service was busy when dialed, then dispatching procedure 26 returns to step 76 to increment the pager counter and make another attempt to page the employee. After three attempts have been made, as noted above, dispatching procedure 26 proceeds from step 78 directly to step 80 and writes the record into the exception file with an indication that paging was not completed.

It should be noted that the most typical cause of a failure to communicate a page to the paging service is a faulty modem. There may, however, be other problems not associated with the

modem. For this reason, in an alternative embodiment of the dispatching process, the process might proceed to the subsequent steps described below (including preparing a mobile terminal message to the vehicle) despite a failure to initiate a page of the vehicle. This redundant communication to the vehicle reduces the opportunity for a vehicle to miss receipt of a command.

It should also be noted that there are some paging services that will confirm receipt of a page at the pager; this kind of service can be important in vehicle dispatching since it prevents the driver from neglecting his/her duties and then claiming that the page was not received. If the paging service provides receipts, these might be detected and logged, for example by an additional background process having the sole purpose of collecting and logging receipts. Separating this function into a separate background process would avoid delays of the main processes while waiting for receipts. Such a background process could also perform step 104 discussed below, which awaits confirmation of an MDT message, and thereby further eliminate delay of the main process.

If paging is completed successfully,
dispatching procedure 26 proceeds to step 84 at
which it initializes a route counter. This counter
is used in connection with a loop including steps
5 86-92, in which the dispatching procedure attempts
to generate a route for delivery to the selected
vehicle's driver.

In this loop, at step 86, dispatching
procedure 26 increments the route counter and at
10 step 88, dispatching procedure 26 determines whether
the route counter is greater than three (for
example). If the route counter is greater than
three, then the dispatching procedure 26 has made
three failed attempts to obtain a route from the AVL
15 system 18 and therefore determines that an
unrecoverable error has occurred during automated
dispatching. In this case, the dispatching
procedure proceeds to step 80 (Fig. 4A) and writes
the current transport ID number to an exception
20 record along with a reason code indicating that
automatic dispatching failed due to failure to
obtain a route from the AVL.

If however, the dispatching procedure has
not yet tried three times to obtain a route, the
25 dispatching procedure proceeds to step 90 and

initiates a request to be sent to the AVL system 18 to obtain a route for the driver to his assigned destination. To do this, the dispatching procedure 26 generates an automated dispatch request record having the general format illustrated in Fig. 3G, and stores this record into the automated dispatch request file 44. The specific format of the automated dispatch request is shown specifically in Fig. 3L-1. As seen in Fig. 3L-1, the route request includes the vehicle identification number for the vehicle selected to service the dispatch request, as well as the pickup address, city, state and zip code, and destination address, city, state and zip code. The pickup and destination addresses are obtained from the tenth and thirteenth fields in the dispatch record. In addition, the dispatching procedure 26 includes a cyclic redundancy code at the end of the request as shown in Fig. 3L-1.

The AVL system 18 includes algorithms to derive routing for drivers from identified pickup points to identified destination points. These algorithms will respond to the information in the request shown in Fig. 3L-1, and generate a response of the kind illustrated in Fig. 3L-2. This response includes a record identifier which is identical to

the record identifier in the request in Fig. 3L-1,
followed by a route string, which is a text string
indicating a list of street names, of streets to be
followed along a best route from the pickup address
to the destination address.

Under normal operation, the AVL system
will produce a response of the kind shown in Fig.
3L-2 within a predetermined period of time.
Accordingly, dispatching procedure 26 waits for this
predetermined period of time and then proceeds to
step 92 at which it determines if a route has been
received from the AVL system by scanning the
contents of the automated dispatch responses file 46
for a record having the same record ID as was
incorporated into the request of Fig. 3L-1. If no
response is received within this time period, then
automated dispatching procedure 26 re-requests a
route by returning to step 86. However, if a route
has been received, automated dispatching procedure
(after deleting the response from responses file 46)
proceeds to step 94 in which it creates a mobile
data terminal message for the selected vehicle,
incorporating the routing directions returned from
the AVL system, and also incorporating any
additional information of use to the driver which

might be incorporated into the dispatch file records when the dispatch file records are created by call takers 12 or remote data entry terminals 14.

One specific format for the mobile data terminal message is illustrated specifically in Fig. 3M-1. The mobile data terminal request incorporates much of the data in the dispatch record, including the transport identification number (field 4 of Fig. 3M-1) the date of service (field 5), the appointment time (field 6) and the transport type (field 7). Also included is patient information including the patient's name and phone number (fields 9 and 10); this information is obtained by referencing a patient information file (not shown) using the patient ID found in field 28 of the dispatch record.

Also included in the mobile data terminal records are the pickup city, street address, state and zip code and the destination street, city, state and zip code (fields 10-17). Next are four text fields for identifying the reason for the transport; this data is derived from fields 24-27 of the dispatch record and is entered by the call takers 12 or the remote data entry terminals 14 for relaying to the drivers. Finally, various vehicle status information is transferred from fields 16-23 of the

dispatch records to fields 22-30 of the mobile data terminal record, including the time of the call requesting vehicle service, the time the crew was notified, the time the crew was dispatched, the time the crew was confirmed as en route, the time the crew arrived at the pickup site, the time the crew was confirmed as en route to their destination, the time that they arrived at their destination and the time that they became available. Finally, in field 10 30, the mobile data terminal message includes the route message for the route generated by the automated dispatching procedure in steps 90 and 92 as discussed above.

To transmit data to the mobile data terminal, dispatching procedure 26 follows a third loop which re-tries three times (for example) to transmit to the mobile data terminal via the AVL system. In the first step 96, dispatching procedure 26 initializes a mobile data terminal counter, and 15 in a subsequent step 98, dispatching procedure 26 increments this counter. After step 98, dispatching procedure 26 determines 100 whether the mobile data terminal counter is greater than three, and, if so, proceeds to step 80 to write a record to the 25 exception file with a reason code indicating that

data transmission failed. In step 102, dispatching procedure 26 stores the mobile data terminal request record, as shown in Fig. 3M-1, into the automated dispatch requests file 44.

5 When the mobile data terminal information request has been placed into the automated dispatch requests file 44, a communications process 24 (discussed below with reference to Figs. 6A and 6B) forwards this request to the AVL system 18. The AVL
10 system in response transmits the mobile data terminal information to the vehicle. The vehicle driver then confirms receipt of the information to the AVL system and the AVL system acknowledges this response to a communications process 24 which then
15 places a mobile data terminal response record into the automated dispatch responses file 46. The format of this confirmation is shown in Fig. 3M-2. It essentially includes the same record ID number as was used in the mobile data terminal request of Fig.
20 3M-1. When this confirmation is received in step 104, dispatching process 26 deletes the response record from the responses file 46 and proceeds to step 106 to perform other dispatching activities. However, if this confirmation is not received after
25 a predetermined period of time, dispatching process

26 proceeds to step 80 (Fig. 4A) to write a record into the exception file 32 along with an indication that automated dispatching failed due to failure to reach the vehicle with a mobile data terminal message.

If a mobile data terminal message is successfully sent to the vehicle and a confirmation is received in step 104, then dispatching process 26 proceeds to step 106 in which it first stores the current time into the dispatch record as the time that the crew is dispatched (field 18).

Next, the dispatching procedure 26 generates a request to the AVL system to determine the latitude and longitude of the vehicle. This is done by generating a request having the format shown in Fig. 3N-1. This request essentially includes the transport number and vehicle ID number (fields 3 and 4) and the pickup and destination addresses (fields 5-12). The dispatching process 26 does not wait for a reply to this latitude-longitude request, because such a reply can take, in many cases, an inordinate amount of time to be returned. Rather, dispatching process 26 proceeds directly from step 106 to step 54, at which it gets a new dispatch record and begins processing the new dispatch record in the

manner discussed above. When the latitude and longitude is ultimately returned, this data is incorporated into the dispatching record by a communications process 24 as is discussed in further detail below in connection with Figs. 6A and 6B.

It will be noted that, as a result of the foregoing procedure, whenever a vehicle is dispatched, the vehicle is immediately thereafter delivered a suggested route for the requested transit. This not only assists the driver if the driver enters unfamiliar territory, but also is a way to ensure that the vehicles follow recommended best routing.

As is noted variously within this application, insurance and Governmental institutions have applied stringent requirements to ambulance carrier billing. One area that as yet is perhaps underregulated, however, is the mileage charged by the carrier. Governmental agencies could, and perhaps in the near future may, begin verifying the mileage charged by ambulance carriers by computing a route from the pickup to destination locations and comparing the mileage of the computed route to the mileage actually charged by the carrier. In the recent past, electronic invoicing for ambulance

services has been used increasingly; this trend also facilitates automatic electronic verification of mileage charges.

As noted above, it is one aspect of the present invention to automatically deliver, during vehicle dispatch, the exact route which will be used by Government or insurance agencies in verifying the mileage charges accumulated by the vehicle. Furthermore, it is a related aspect of the invention to automatically perform such verification upon an ambulance service invoice to determine if the mileage charges on the invoice are within parameters set by a Government or insurance agency.

Referring now to Fig. 5, the operations of the vehicle monitoring process 28 can be discussed in particular detail. The vehicle monitoring process is responsible for tracking and monitoring the activities of vehicles once they have been dispatched by one of the dispatching processes 26. It operates in generally the same overall fashion as the dispatching processes 26, by reviewing records in the dispatch file and acting on individual records when action appears to be needed. Accordingly, in the first step 120, the vehicle monitoring process opens the dispatch file 30 and

then extracts 122 the dispatch records from the
dispatch file. Then, it gets 124 a particular
record from the dispatch file for review. If the
end of the dispatch file is reached in step 126, the
5 vehicle monitoring process returns to step 122 to
re-extract the records from the file and re-analyze
each record.

If a record has been found and the end of
file has not been reached, the vehicle monitoring
10 process 28 moves on to step 128 and determines
whether the current record is identified by a record
in the exception file 32. If the record is
identified in the exception file, this indicates
that the automated dispatching processes have found
15 an irreconcilable error and have referred the
dispatch job for human intervention. Accordingly,
the vehicle monitoring process returns to step 124
to get a new dispatch record.

If a record is found which is not in the
20 exception file, the vehicle monitoring process 28
proceeds to step 130 and determines the status of
the current dispatch record. If the record is
marked as dispatched, then the vehicle monitoring
process 28 is responsible for monitoring the status
25 and progress of the vehicle in servicing the record.

However, if the record status is not dispatched, then the vehicle monitoring process 28 is not concerned with the record and so returns to step 124 to get another record.

5 If a record is found which is not in the exception file and is dispatched, the vehicle monitoring process then proceeds to step 132 to determine if the record is a record for the company or client being serviced by the vehicle monitoring
10 process 28. This is determined by accessing the automated dispatch setup file 48 and, in particular, field 1 of that file as shown in Fig. 3I, which identifies the company code for the company currently being serviced by the automated
15 dispatching system. This company code is then compared with the transport ID number in the first field of the dispatch record as shown in Fig. 3A, which, as noted above, contains the company code. If the record is not related to the company
20 currently being serviced by the automated dispatching system, the vehicle monitoring process skips the record by returning to step 124 and getting a new record.

 If, however, a record is found which is
25 not in the exception file, is currently dispatched,

and is a job for the current company, the vehicle monitoring process proceeds to step 134 at which it determines whether the vehicle assigned to the record has reported itself as arrived at its pickup site. This is determined by checking the value in the time crew arrived at pickup field, which is the 20th field in the dispatch record as illustrated in Fig. 3A.

One of the important functions of the vehicle monitoring process is to determine if a vehicle is late for arrival at its pickup site and, if so, to warn the human dispatchers 16 so that the appropriate action can be taken, for example, calling the customer to inform them that the vehicle will be late. Accordingly, if a vehicle has not reported as arrived, the vehicle monitoring process proceeds to steps 136 et seq. at which it determines if the vehicle is late.

Initially, the monitoring process 28 determines simply whether the vehicle is late for arrival at the pickup site. To do so, process 28 first determines 136 whether the record is scheduled for a specific appointment time, or ASAP service. If the record is schedule for a specific appointment time, process 28 proceeds to step 137 to determine

if the current time is later than the appointment time. If the current time is later than the appointment time, process 28 proceeds to step 160 to write a record to the exception file 32 including a reason code indicating that automated dispatching failed because the vehicle was late to the pickup site.

If, however, at step 136, monitoring process 28 determines that the record is an ASAP request, then it proceeds to step 138 to determine whether the vehicle is late. In step 138, monitoring process 28 references the status limit file 44 to locate a status limit record (Fig. 3K) for the current company, and then reads the last field of this record to determine the "ASAP Limit" for the company. Then, process 28 compares the "ASAP Limit" to the difference between the current time and the time the ASAP request was received (as indicated in field 16). If more time than is indicated by the ASAP Limit has elapsed since the call was received, then the vehicle is considered late and monitoring process 28 proceeds to step 160 to write a record in the exceptions file.

If, however, in either steps 137 or 138, the vehicle is not determined to be late, then

monitoring process 28 proceeds to step 140. At step
140, monitoring process 28 determines whether the
company it is servicing uses late status monitoring
for its vehicles. This is determined by referencing
5 the third field of the automated dispatch setup file
which indicates whether status late activity is to
be monitored or not. If status late activity is to
be monitored, the vehicle monitoring process
proceeds to step 142 at which it determines whether
10 the vehicle is late in reporting its status.

To determine if a vehicle is late in
reporting its status, the monitoring process reviews
the status times identified in fields 17 through 23
of the dispatch record to locate the most recent
15 status reported by the vehicle. The vehicle status
will be one of "notified", "dispatched", "en route
to pickup", "arrived at pickup", "en route to
destination", "arrived at destination", or
"available". Then, if the status is anything other
20 than "available", monitoring process 28 determines
how long the vehicle has been at its current status
by comparing the current time to most recent time in
fields 17 through 22 of the dispatch record.
Finally, the monitoring process 28 references the
25 status limit file 49 to locate the status limit

record (Fig. 3K) for the company to be serviced.

From this record, the monitoring process 28 determines the status limit for the current vehicle's status. Finally, the time the vehicle has been at its current status is compared to the predefined limit for that status. If the vehicle has exceeded the predefined limit, then the monitoring process 28 proceeds to step 160 to write an exception record identifying the dispatch record and including a code indicating that the vehicle was late in its status reports.

If the vehicle is not otherwise late, but has not arrived (i.e., if the vehicle passes from steps 134, 140, or 142), then further analysis of the vehicle status may still be needed, because the pickup may have been cancelled by the customer at the pickup site, or the crew may have completed the job and reported itself as available. Thus, in the cases not discussed above, monitoring process 28 proceeds from steps 134, 140 or 142 to step 144, at which it determines whether the vehicle has reported itself as available. If not, monitoring process proceeds to step 124 to obtain a new dispatch record for processing.

However, if the vehicle has reported
itself as available, monitoring process 28 proceeds
from step 144 to step 146, at which it marks the
status flag in the dispatch record (field 2) with an
5 "F" to indicate that the record has been finished.
This action will disable any further dispatching on
the dispatch record. At the same time, monitoring
process 28 deletes the record in the outbound
vehicle file 36 which associates the vehicle with
10 the dispatch record. Doing will allow the vehicle
to be recognized as available in step 70 of the
dispatching process 26, so that new tasks will be
assigned to the vehicle.

After these steps, the vehicle monitoring
15 process proceeds to step 148 and generates an
invoice record having the format shown in Fig. 3B,
using the information in the dispatch record, and
then writes the resulting invoice record to the
invoice file 34 for later use in generating invoices
20 for the services rendered by the vehicle. As can be
seen in Fig. 3B, the invoice record is generated by
transferring various fields from the dispatch record
into the new invoice record, including the transport
ID number and date of service, the vehicle
25 identification number and the driver and attendants'

employee numbers, the pickup and destination, the reasons for transport and billing information, and the time of various activities including the time the dispatch request was received, the time the crew was notified, dispatched, reported as en route to pickup, reported as arrived, reported as en route to its destination, and reported as available upon completion of the job. This detailed information and other information discussed above is important in satisfying insurance companies and federal or state agencies who demand detailed billing for compensation for transportation services.

The information in the invoice record may be used to print an invoice for mailing without further human intervention. Or, alternatively, the information might be used to generate and transmit an electronic invoice for services, leading to electronic payment, such that the entire transaction may be completed in a paperless manner without postage expense and handling, and the resulting delays and risks of loss. Another alternative is that the invoice records might be transmitted to customer sites (those having remote data entry persons 14 {Fig. 1}), to print an invoice at the customer site for delivery. Again, postage expense,

delay, and risk of loss are reduced or eliminated through direct electronic billing.

After generating a suitable invoice record, the vehicle monitoring procedure proceeds to step 150 at which it notifies the automatic vehicle locator system 18 that the vehicle is now available. The automatic vehicle locator system 18 retains internal tables indicating the status of each of the vehicles that it tracks, so that it may for example display the status of vehicles and their locations for a human dispatcher 16, or may produce reports of vehicle activity and vehicle availability.

The AVL system is notified of a new vehicle status by an automated dispatch request having the general format shown in Fig. 3G which is stored into the automatic dispatch requests file 44 and forwarded to the AVL system by the communications process as discussed below with reference to Figs. 6A and 6B. The specific format of the AVL transport status update is shown in Fig. 3O-1, and includes various information from the dispatching record, including the vehicle ID number, the transport ID number, the transport type, the appointment time, AVL system code for the new transport status, and the time at which this status

became effective, the driver and attendant employee numbers, the patient's name and the pickup and destination addresses.

After thus notifying the AVL that a
5 vehicle is available, the vehicle monitoring process
28 returns to step 124 to get a new dispatch record.

It will be noted that the monitoring
process described above relies on the vehicle
operators to update their status regularly as they
10 proceed through an assigned task. While this is an
effective system for updating status, others might
be used. For example, to determine whether a
vehicle is en route, the monitoring process might
compare two recent position readings for the vehicle
15 to determine whether the vehicle is moving. To
determine whether a vehicle is at the pickup or
destination site, the monitoring process might
simply compare the position of the vehicle to the
position of the pickup and destination site. If
20 such an approach is taken it is important to use
highly accurate navigation tools, to discriminate a
vehicle which is at the pickup site from a vehicle
which is caught at a traffic light one block away
from the pickup site. However, it is believed that
25 these obstacles can be overcome and monitoring

performed with even less human involvement than is described above.

Referring now to Figs. 6A and 6B, the communications process 24 can be more completely understood. The communications process reads requests from the automated dispatch request file 44, generates the appropriate communications to the AVL system 18, and also reads responses from the AVL system 18 and produces response records and stores them into automated dispatch responses file 46 so that the response records can then be evaluated by dispatching process 26 or vehicle monitoring process 26.

To initialize itself, the communications process 24 opens 170, a communications port to the AVL system 18 and also opens the requests file 44 and responses file 46.

The first part of the communications process illustrated in Fig. 6A is responsible for reading requests from the requests file 44 and generating communications to the AVL system 18 through the AVL port. Accordingly, in this portion of the communications process 24, the communications process reads a record from the request file (step

172). If at step 174 the end of the request file is reached, the communications process proceeds to step 190 (Fig. 6B) to evaluate responses. If, however, the end of the file has not been reached, the communications process proceeds to step 176 and writes the information from the current record to the AVL port. Then, the communications process performs a loop in which it waits for an acknowledgment from the AVL system 18. This loop is repeated three times (for example) as determined by a counter which is initialized to zero in step 178. If an acknowledgment is received in step 180, the communications process then deletes the request record from the requests file (step 181, and proceeds to step 190 (Fig. 6B) to handle responses from the AVL. However, if no response is received, the communications process increments the counter (step 182) and then determines whether the counter has been incremented above a value of two (step 184). If the counter has not yet reached a value of two in step 184, the communications process returns to step 180 to determine if an acknowledgment has yet been received.

However, if the counter exceeds the value of two (for example), then the AVL communication has

failed. In this situation, the communications process proceeds to step 186 in which it generates an exception record based on the request and then writes the exception record to the exception file (step 188) to refer the situation to a human dispatcher 16. The exception record includes a code indicating that automated dispatch failed in attempting to communicate with the AVL.

After steps 174, 181 or 188, the communications process arrives at step 190 of Fig. 6B. At this step and in the subsequent steps, the communications process attempts to read information from the AVL system 18 and prepare the appropriate response records for use by the dispatching process 26 or vehicle monitoring process 28. If the AVL port times out 192 before a response is received, then the communications process simply returns to step 172 (Fig. 6A) to locate records in the requests file, if any, and act on those records.

If, however, information is received from the AVL port, the communications process 24 evaluates the information received from the AVL port to determine what kind of message is being received and to take the appropriate action. For example, if a request for status information is received, this

is determined in step 194 and handled in steps 196
and 198. If mobile data terminal information is
received, this is determined in step 197 and handled
in steps 199-204. If an updated status is received
5 from a vehicle, this is determined in step 206 and
handled in steps 208-214. If a latitude and
longitude for a vehicle is returned from the AVL,
this is determined in step 216 and handled in steps
218-222. Other responses from the AVL are handled
10 in step 224.

A request for status information may be
generated unilaterally by the AVL to update its
internal tables of vehicle status information. Such
a request is received by the communications process
15 in the form shown in Fig. 3P-1. The request
includes a record identification number which is
equal to the vehicle identification number for which
the status is requested. To respond to this
request, the communications process accesses the
20 dispatch record for the job currently being handled
by the vehicle identified by the vehicle ID number
in the request for status information. This is done
by referencing the outbound vehicle file 36 to
determine the transport ID number associated with
25 the vehicle ID number. Then, this transport ID

number is used to retrieve the dispatch record from the dispatch file 30 having this transport ID number. Then, in step 198 this dispatch record is used to generate a response to the AVL identifying the status of the vehicle. This response takes the form illustrated in Fig. 3P-2 and includes the vehicle identification number, the transport record identifier, the type of the vehicle, its current appointment time, its status and the time that its status was last updated, the driver and attendant employee numbers, the patient's name and the pickup and destination addresses. This output record is then returned to the AVL system 18 by proceeding directly to step 176 in Fig. 6A and writing the contents of this record to the AVL port.

Mobile data terminal information may be transmitted unilaterally from the AVL system 18, in response to an entry of updated information into a mobile data terminal by a vehicle driver. When the vehicle driver transmits amendments to mobile data terminal information, these amendments are received by the AVL system 18 and then forwarded to the communications process 24. The format of the information received from the mobile data terminal is the same as the format of the information

transmitted to a mobile data terminal as seen in Fig. 3M-1, with the exception that a route message is not returned from the mobile data terminal. The resulting record format is shown in Fig. 3Q-1.

5 To respond to mobile data terminal
information received from the AVL, the
communications process reads the transport
identification number from the fourth field in the
mobile data terminal information and uses this
10 identifier to locate the dispatch record associated
with the transport identification number in the
dispatch file 30. Then the communications process
reads this dispatch record (step 199) and updates
the fields of the dispatch record in response to the
15 mobile data terminal information received from the
AVL system 19. For example, the ambulance crew may
have updated the address of the pickup or
destination, or may have added reasons for the
transport or diagnostic information. After updating
20 the dispatch fields 200, the communications process
writes 202 the amended dispatch record into the
dispatch file 30. Finally, the communications
process acknowledges receipt of the transmission
from the AVL system by generating a brief receipt
25 message as illustrated in Fig. 3Q-2. This message

includes the record ID of the incoming mobile data terminal message and the vehicle identification number. The acknowledge message of Fig. 3Q-2 is then transmitted to the AVL system by proceeding
5 directly to step 176 of Fig. 6A.

Updated status information may be received from vehicles unilaterally at many points during their performance of assigned duties. For example, when the vehicle wishes to confirm that it is en
10 route to its pick-up, it may use its mobile data terminal to send a status update message to the automated dispatch system. Furthermore, when the vehicle becomes available, it may send a different status message. These status messages are received
15 by the AVL system and then forwarded to the automated dispatch system and received by communications process 24.

Status messages may be prepared by typing information to the mobile data terminal. Or the
20 mobile data terminal may be voice activated and controlled so that the driver and/or crew can control it hands-free while driving.

When a received updated status message is identified in step 206, the communications process
25 first reads the updated status message to determine

the associated dispatch record. The format of an updated status message is shown in Fig. 3R-1. The format includes a record identifier which includes the transport identification number and vehicle identification number. This record identifier is used to locate and read the dispatch record based on the transport identification number. Next, the communications process 24 uses the status level identified in the third field of the status change message to update the status fields (fields 18-23 of Fig. 3A) in the dispatch record (step 210). Next, the dispatch record with updated status fields is written back to the server 10 with the updated status information. Finally, an acknowledgement message of the form shown in Fig. 3R-2 is generated by the communications process and delivered to the AVL system by proceeding directly to step 176 of Fig. 6A.

Another type of message which may be regularly received by the automated dispatch system is the latitude and longitude of a vehicle, as is requested by the dispatching process 26 in step 106. In response to this request, the AVL system 19 will return a response having the format shown in Fig. 3N-2. The response includes a record identifier

indicating the transport number, terminal number and
sequence number supplied in the request shown in
Fig. 3N-1. Furthermore, the response indicates the
latitude and longitude of the pickup address and
5 destination address supplied in the request message.

In handling a latitude/longitude response,
the communications process first uses the transport
identification number in the response to locate the
dispatch record and to read 218 this dispatch
10 record. Next, the communications process updates
220 the latitude and longitude fields (fields 11-12
and 14-15) in the dispatch record. Finally, the
communications process writes 222 the amended
dispatch record so that the latitude/longitude
15 information is available for later use. then, the
communications process returns to step 172 to begin
evaluation of records in the requests file 44.

Additional forms of responses may be
handled by communications process 24. In
20 particular, the response from the AVL which
indicates the closest vehicles requested by a
dispatching process (Fig. 3K-2) is handled by
writing a corresponding record to the responses file
46 in step 224. Similar actions are taken to store
25 a response of the kind shown in Fig. 3L-2 which

indicates a route for a vehicle to a destination.
Also, step 224 stores responses of the kind shown in
Fig. 3M-2 which indicate a confirmation of a MDT
message.

5 The communications process of Figs. 6A and
6B may also be used to transmit and receive "manual"
message packets, i.e., manually generated, non-
standard messages which are exchanged between a
human dispatcher 16 and the driver of a vehicle 20,
10 particularly during exceptional situations. To
perform such transmissions, a dispatcher 16 may use
software to generate a suitable request message and
store this request message in the automated dispatch
request file 44. Furthermore, a driver may type (or
15 voice-enter) a generic text message into a message
data terminal and transmit it to the AVL system
which will in response produce a generic text
message that may be stored by communications process
24 in step 224 for review by a dispatcher 16. Thus,
20 any software used by the dispatcher to monitor
exception conditions and respond to those
conditions, may use the automated data transfer
capabilities of the communications process 24 to
facilitate these communications.

While the present invention has been illustrated by a description of various embodiments and while these embodiments have been described in considerable detail, it is not the intention of the applicants to restrict or in any way limit the scope of the appended claims to such detail. Additional advantages and modifications will readily appear to those skilled in the art.

For example, one might include a field in each record of the automated dispatch file (see Fig. 3I), to indicate those customers for whom automated dispatching is to be performed. Doing so would add flexibility by, for example, permitting management to make a policy decision not to perform automated dispatching for a given customer or contract. To implement this, the dispatching process 26 illustrated below in Fig. 4A would need to be modified so that, in the initial series of tests 56-62, the dispatching process determines whether automated dispatching was enabled for the current company, and if not, immediately moves to step 80 to write the current record in the exceptions file for manual dispatching.

Furthermore, methods and apparatus described herein could be used for any kind of

vehicles, not limited for example to taxis and
ambulances. For example, shipping traffic, whether
by land (e.g., semitrailers), sea (e.g., freighters)
or air (e.g., cargo planes) could be dispatched and
5 monitored under principles of the present invention.
Moreover, land, sea or air traffic control could in
general be performed in a fully automated manner
using principles of the present invention. One
particularly fruitful area is the ground traffic
10 control of ground vehicles and airplanes at airport
facilities; typically movements of ground vehicles
and airplanes on the airport tarmac are controlled
by human dispatchers using their visual information
and/or radar systems, which system is prone to
15 failures such as recently experienced at the Denver
airport.

Data gathered from vehicles might not be
limited to the vehicles position and status; in
addition, the system might gather information on
20 whether the vehicle is moving, the velocity of the
vehicle, whether the vehicle is braking, the fuel
usage of the vehicle, whether emergency signals of
the vehicle are operating, and whether the engine is
idling. This data could be used to determine, for
25 example, whether the vehicle is caught in traffic or

moving smoothly to its destination. Furthermore,
the system might detect situations where the vehicle
is being used inappropriately, for example, a
situation where the crew is between tasks and has
5 left the engine idling for a long period of time.
Two-way communication with the MDT might be
enhanced, for example, to permit the central station
to control actions of the vehicle, e.g., switch the
vehicle's engine off. This function could be
10 particularly useful as a theft prevention.

All of these embodiments, and others, are
within the spirit and scope of the invention. The
invention in its broader aspects is therefore not
limited to the specific details, representative
15 apparatus and method, and illustrative example shown
and described. Accordingly, departures may be made
from such details without departing from the spirit
or scope of applicant's general inventive concept.

What is claimed is:

Claims

1 1. A system for controlling vehicles to
2 provide transportation services without need for
3 human intervention, comprising:
4 a database including records each
5 documenting needed transportation services;
6 processing circuitry performing a
7 dispatching process including reviewing said
8 records, locating a record indicating a need for
9 immediate transportation service, and instructing a
10 vehicle to provide said vehicle service; said
11 processing circuitry further performing a monitoring
12 process including reviewing said records and vehicle
13 activity information to identify transportation
14 services which are not being adequately provided;
15 and
16 communication circuitry forwarding
17 instructions produced by said dispatching process
18 from said processing circuitry to a vehicle; said
19 communication circuitry further providing vehicle
20 activity information relating to said vehicle to
21 said processing circuitry for review by said
22 monitoring process.

1 2. The system of claim 1 wherein said
2 processing circuitry is a microcomputer running a
3 multitasking operating system, said multitasking
4 operating system supporting both said dispatching
5 process and said monitoring process.

1 3. The system of claim 1 wherein said
2 processing circuitry is a network of computers, one
3 computer of said network running said dispatching
4 process and one computer of said network running
5 said monitoring process.

1 4. The system of claim 1 wherein said
2 processing circuitry performs multiple said
3 dispatching processes in parallel and multiple said
4 monitoring processes in parallel.

1 5. The system of claim 1 wherein said
2 communications circuitry forwards instructions to a
3 vehicle via radio communications.

1 6. The system of claim 1 wherein a vehicle
2 reports information on its activities by radio
3 communications to said communications circuitry.

1 7. The system of claim 1 wherein said
2 communications circuitry forwards instructions to a
3 vehicle and receives vehicle activity information
4 from a vehicle via both ground-based radio
5 communication and satellite-based radio
6 communication.

1 8. The system of claim 1 further
2 comprising satellite-based vehicle tracking
3 circuitry for tracking locations of said vehicles,
4 said communication circuitry being
5 connected to said vehicle tracking circuitry for
6 determining vehicle activities for forwarding to
7 said monitoring circuitry.

1 9. The system of claim 8 wherein a request
2 for transportation services requests a vehicle to
3 travel to an appointed location, and
4 said monitoring process reviews said
5 vehicle activities to determine whether a vehicle
6 has arrived at or is en route to said appointed
7 location in deciding whether a customer request is
8 being adequately serviced.

1 10. The system of claim 9 wherein a
2 vehicle operator manually communicates the arrival
3 of said vehicle at said appointed location to said
4 communication circuitry, and said monitoring process
5 determines whether said communication has been
6 received from the vehicle operator to determine
7 whether a customer request is being adequately
8 serviced.

1 11. The system of claim 9 wherein said
2 vehicle includes circuitry for automatically
3 transmitting a position of said vehicle to said
4 communication circuitry, and said monitoring process
5 determines whether said transmitted position is
6 similar to said appointed location to determine
7 whether a customer request is being adequately
8 serviced.

1 12. The system of claim 1 wherein
2 said communication circuitry respectively
3 reads and writes communication request and response
4 records in said database,
5 said processing circuitry instructing a
6 vehicle to provide services by writing a
7 communication request in said database for later
8 forwarding by said communication circuitry, and said
9 processing circuitry obtaining vehicle activity
10 information by reading response records in said
11 database.

1 13. The system of claim 1 further
2 comprising data entry circuitry for manual operation
3 to create a record.

1 14. The system of claim 13 wherein said
2 data entry circuitry is located at a remote site in
3 telephonic communication with said database server.

1 15. The system of claim 14 wherein said
2 data entry circuitry includes a reader for reading
3 information from an identification card used by a
4 person requesting transportation services.

1 16. The system of claim 13 wherein said
2 data entry circuitry is a touch-tone responsive
3 telephone receiver for receiving touch-tone
4 telephone signals and creating a record therefrom.

1 17. The system of claim 1 wherein said
2 database, said processing circuitry and said
3 communication circuitry are located at a plurality
4 of locations and in telephonic communication with
5 each other.

1 18. The system of claim 1 wherein said
2 vehicles are ambulances and said records including
3 an indication of whether requested transportation
4 services must include advanced life support
5 facilities.

1 19. The system of claim 1 wherein said
2 monitoring process creates exception records in said
3 database identifying those records which are not
4 being adequately serviced, and said system further
5 comprises dispatcher circuitry for operation by a
6 human dispatcher to use the exception records to
7 locate records which are not being adequately
8 serviced and take action with respect to such
9 records.

1 20. The system of claim 1 wherein said
2 database includes records indicating billing
3 information associated with requested transportation
4 services, and

5 said monitoring process, upon determining
6 completion of requested services for a record,
7 generates an invoice record in said database for
8 billing to a customer, said invoice record including
9 said billing information.

1 21. The system of claim 20 wherein said
2 billing information includes a log of vehicle
3 activities performed in response to a customer
4 request.

1 22. The system of claim 20 wherein said
2 billing information includes insurance information
3 associated with a customer receiving transportation
4 services.

1 23. The system of claim 20 wherein said
2 billing information includes information on special
3 handling provided to a customer along with
4 transportation services.

1 24. The system of claim 1 wherein said
2 vehicle activity information indicates one or more
3 of:

4 whether said vehicle is moving,
5 the velocity of said vehicle,
6 whether said vehicle is braking,
7 fuel usage of said vehicle,
8 whether emergency signals of said vehicle
9 are operating, and

10 whether an engine of said vehicle is
11 idling.

1 25. The system of claim 24 wherein said
2 monitoring process determines from said vehicle
3 activity information whether said vehicle is being
4 used appropriately at times when said vehicle is not
5 delivering transportation services, and if so
6 creates an exception record in said database
7 identifying the vehicle which is not being used
8 appropriately.

1 26. The system of claim 24 wherein said
2 monitoring process determines from said vehicle
3 activity information whether said vehicle is stalled
4 in traffic, and if so creates an exception record in
5 said database identifying the vehicle which is
6 stalled in traffic.

27. The system of claim 1 wherein said processing circuit further performs a system status management process including reviewing said records and vehicle activity information to determine and predict future needs for transportation services and comparing said future needs to expected availability of transportation services to identify future times at which available transportation services will not meet predicted needs.

28. The system of claim 27 wherein said system status management process creates an exception record in said database identifying future times at which available transportation services will not meet predicted needs.

29. The system of claim 27 wherein said system status management process includes instructing a vehicle to pre-position to a location where said vehicle will be better able to meet predicted future needs for transportation services.

1 30. The system of claim 1 wherein a
2 dispatching process instruction to a vehicle to
3 provide said vehicle service includes an
4 identification of a route to be followed by said
5 vehicle.

1 31. The system of claim 30 wherein said
2 dispatching process includes selecting said route in
3 accordance with routing demanded by governmental or
4 insurance entities.

1 32. A system for controlling ambulances so
2 as to ensure reimbursement for transportation
3 services provided by said ambulances, comprising:
4 a database including records each
5 documenting needed transportation services;
6 processing circuitry performing a
7 dispatching process including reviewing said
8 records, and locating a record indicating a need for
9 immediate transportation service, and instructing a
10 vehicle to provide said vehicle service, an
11 instruction produced by said processing circuitry
12 including an identification of a route to be
13 followed by said vehicle, said dispatching process
14 selecting said route in accordance with routing
15 demanded by governmental or insurance entities in
16 order to ensure reimbursement for transportation
17 services provided by ambulances.

1 33. A system for ensuring that appropriate
2 mileage charges are being applied to transportation
3 services submitted for reimbursement to a
4 governmental or insurance entity, comprising:

5 a database including records each
6 documenting transportation services provided and
7 submitted for reimbursement, said records indicating
8 a starting and ending point of said transportation
9 services and a mileage purportedly travelled in
10 providing said transportation services;

11 processing circuitry reviewing said
12 records, determining from a record said starting and
13 ending points and mileage purportedly travelled,
14 determining a shortest route from said starting
15 point to said ending point, and comparing a mileage
16 associated with said shortest route to said mileage
17 purportedly travelled to determine if said mileage
18 purportedly travelled is appropriate for said
19 services.

1 34. A system for controlling vehicles to
2 provide transportation services, comprising:
3 a database including records each
4 documenting needed transportation services requested
5 by customers;
6 processing circuitry performing a system
7 status management process including reviewing said
8 records and current vehicle activity information to
9 determine and predict future needs for
10 transportation services and comparing said future
11 needs to expected availability of transportation
12 services to identify future times at which available
13 transportation services will not meet predicted
14 needs.

1 35. The system of claim 34 wherein said
2 system status management process creates an
3 exception record in said database identifying future
4 times at which available transportation services
5 will not meet predicted needs.

1 35. The system of claim 34 wherein said
2 system status management process instructs a vehicle
3 to pre-position to a location where said vehicle
4 will be better able to meet predicted future needs
5 for transportation services.

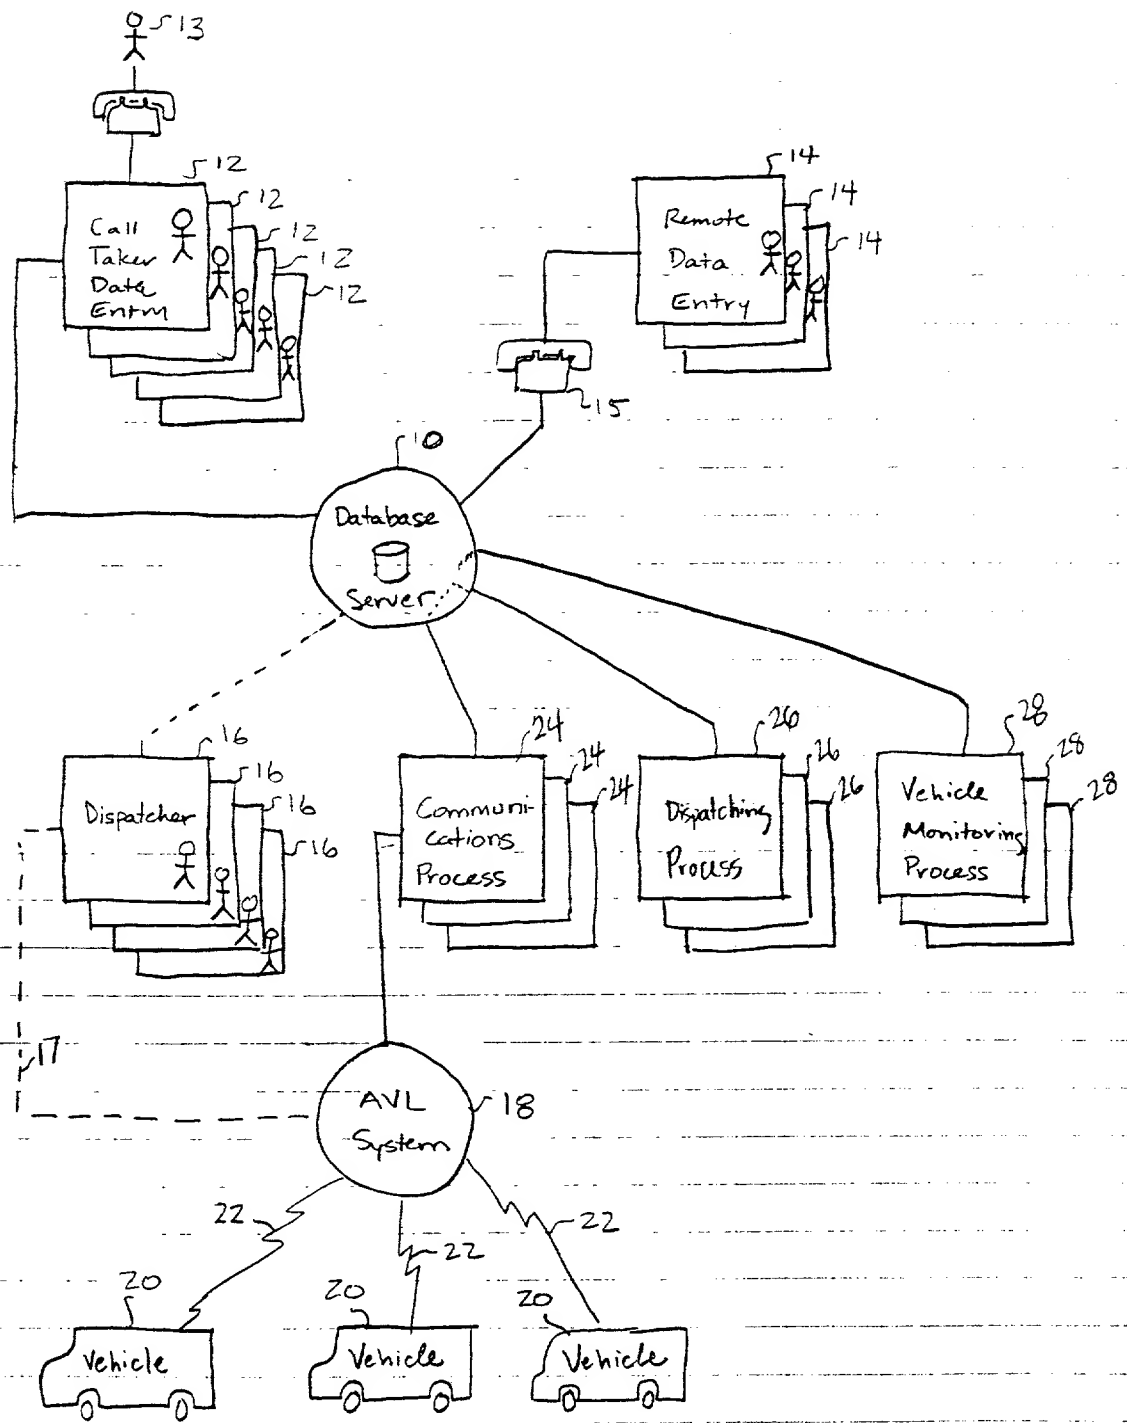


Fig. 1

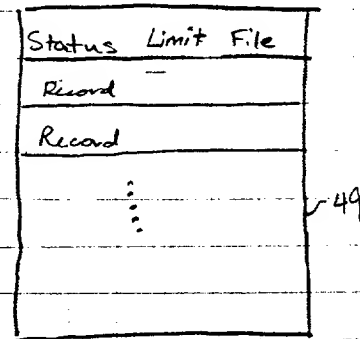
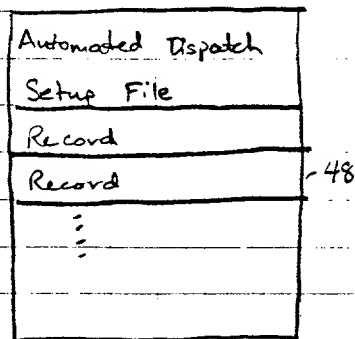
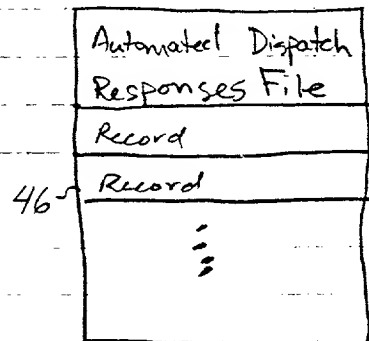

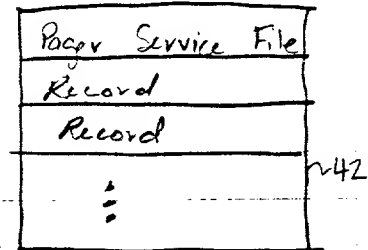

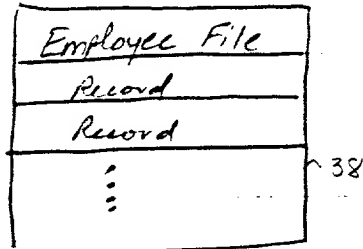


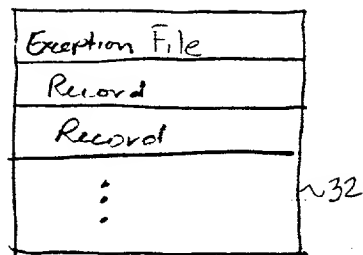



Fig. 2

Dispatch File

- 1Transport ID Number
- 2Status Flag (= " ", "D", "C", or "F")
- 3Date of Service
- 4Appointment Time (= <time> or "ASAP")
- 5Lead Time
- 6Transport Type (Wheelchair/Basic/AdvancedLifeSupport)
- 7Vehicle ID Number
- 8Driver Employee Number
- 9Attendant Employee Number
- 10Pickup Location
- 11Pickup Latitude
- 12Pickup Longitude
- 13Destination Location
- 14Destination Latitude
- 15Destination Longitude
- 16Time of Call
- 17Time Crew Notified
- 18Time Crew Dispatched
- 19Time Crew En Route to Pickup (Scene)
- 20Time Crew Arrived at Pickup (Scene)
- 21Time Crew En Route to Destination
- 22Time Crew Arrived at Destination
- 23Time Crew Reported as Available
- 24Reason for transport 1
- 25Reason for transport 2
- 26Reason for transport 3
- 27Reason for transport 4
- 28Patient ID number
- 29Name of caller
- 30Contract number
- 31Base rate codes
- 32Mileage rate codes
- 33Extra services rate codes
- 34Billing address codes

Fig. 3A

Invoice File

1Transport ID Number
2Date of Service
3Vehicle ID Number
4Driver Employee Number
5Attendant Employee Number
6Pickup Location
7Destination Location
8Time of Call
9Time Crew Notified
10Time Crew Dispatched
11Time Crew En Route to Pickup (Scene)
12Time Crew Arrived at Pickup (Scene)
13Time Crew En Route to Destination
14Time Crew Arrived at Destination
15Time Crew Reported as Available
16Reason for transport 1
17Reason for transport 2
18Reason for transport 3
19Reason for transport 4
20Patient ID number
21Name of caller
22Contract number
23Base rate codes
24Mileage rate codes
25Extra services rate codes
26Billing address codes

Fig. 3B

Outbound Vehicle File

1Vehicle ID Number
2Transport ID Number

Fig. 3C

Employee File

1Employee ID Number
2Employee Name

Fig. 3D

Employee Pager File

- 1Employee ID Number
- 2Pager Service Code Number
- 3Pager PIN Number
- 4Pager Phone Number
- 5Text or Alpha ("T" or "A")

Fig. 3E

Pager Service File

- 1Pager Service Code Number
- 2Pager Service Modem Number
- 3Pager Modem Login ID
- 4Pager Modem Password
- 5Pager Modem Baud Rate
- 6Pager Modem Word Length
- 7Pager Modem Stop Bits
- 8Pager Modem Script Name

Fig. 3F

Automated Dispatch Requests File

- Message Packet Key Code
 - Terminal ID Number
 - Transport ID Number
 - Unique Sequence Number (000)
- Message Body

Fig. 3G

Automated Dispatch Responses File

- Message Packet Key Code
 - Terminal ID Number
 - Transport ID Number
 - Unique Sequence Number (000)
- Message Body

Fig. 3H

Automated Dispatch Setup File

- 1 Company Code
- 2 Dispatch Advance Action Setting (minutes)
- 3 Monitor Status Late Activity ("Yes"/"No")
- 4 AVL Port Operating System Name
- 5 AVL Port Lock File Name

Fig. 3I

Exception File

- 1 Transport ID Number
- 2 Exception code

Fig. 3J

Status Limit File

- 1 Company Code
- 2 Notified limit (minutes)
- 3 Dispatched limit (minutes)
- 4 En Route to Pickup limit (minutes)
- 5 Arrived limit (minutes)
- 6 En Route to Destination limit (minutes)
- 7 At Destination Limit (minutes)
- 8 ASAP Limit (minutes)

Fig. 3K

From CAD

record code = 01

record ID = transport number + terminal number + sequence (000)

transport / vehicle type (als / bls / w/c)

pick up address

pick up city

pick up state

pick up zip code

quantity of vehicle to return from search

CRC

Fig. 3K-1

From AVL

record code = 02

record ID = transport number + terminal number + sequence (000)

vehicle string (sorted closest to farthest away from address)

CRC

Fig. 3K-2

From CAD

record code = 10

record ID = transport number + terminal number + sequence (000)

vehicle ID number

pick up address

pick up city

pick up state

pick up zip

destination address

destination city

destination state

destination zip

CRC

From AVL

record code = 11

record ID = transport number + terminal number + sequence (000)

route string

CRC

Fig. 3L-1

Fig. 3L-2

From CAD

record code = 30

record ID = transport number + terminal number + sequence (000)

vehicle ID number

transport number

5 **date of service**

appointment time

transport type

patient name

patient phone number

10 **pick up street address**

pick up city

pick up state

pick up zip code

destination street address

15 **destination city**

destination state

destination zip code

reason for transport 1

reason for transport 2

20 **reason for transport 3**

reason for transport 4

time of call

notified

dispatched

25 **in route**

arrive pick up

in route

arrive destination

available

30 **route message**

CRC

Fig.
3M-1

From AVL

record code = 31

record ID = transport number + terminal number + sequence (000)

CRC

Fig
3M-2

From CAD

record code = 70

record ID = transport number + terminal number + sequence (000)

transport number

vehicle number

5 **pickup street address**

pickup city

pickup state

pickup zip code

10 **destination street address**

destination city

destination state

destination zip code

CRC

Fig 3N-1

From AVL

record code = 71

record ID = transport number + terminal number + sequence (000)

transport number

pickup latitude

pickup longitude

destination latitude

destination longitude

CRC

Fig. 3N-2

From CAD

record code = 60
record ID = vehicle ID number
vehicle ID number
transport number
5 transport type
appointment time
transport status code
transport status time
driver employee number
10 attendant employee number
patient name
pick up address
pick up city
pick up state
15 pick up zip code
destination address
destination city
destination state
destination zip code
CRC

Fig. 30-1

From AVL

record code = 61
record ID = vehicle number
CRC

Fig. 30-2

record code = 50
record ID = vehicle number
CRC

Fig. 3P-1

From CAD

record code = 51
record ID = vehicle ID number
vehicle ID number
transport number
transport type
appointment time
transport status code
transport status time
driver employee number
attendant employee number
patient name
pick up address
pick up city
pick up state
pick up zip code
destination address
destination city
destination state
destination zip code
CRC

Fig. 3P-2

From AVL

record code = 40

record ID = transport number + vehicle ID number + sequence (000)

vehicle ID number

transport number

5 **date of service**

appointment time

transport type

patient name

patient phone number

10 **pick up street address**

pick up city

pick up state

pick up zip code

destination street address

15 **destination city**

destination state

destination zip code

reason for transport 1

reason for transport 2

20 **reason for transport 3**

reason for transport 4

time of call

notified

dispatched

25 **in route**

arrive pick up

in route

arrive destination

available

CRC

Fig. 3Q-1

From CAD

record code = 41

record ID = transport number + vehicle ID number + sequence (000)

vehicle ID number

CRC

Fig. 3Q-2

record code = 20
record ID = transport number + vehicle number
status level (1 - 8 from mobile data terminal switch device)
CRC

Fig. 3R-1

record code = 21
record ID = transport number + vehicle number
status level (1 - 8 returned for acknowledgment)
CRC

Fig. 3R-2

[illegible]

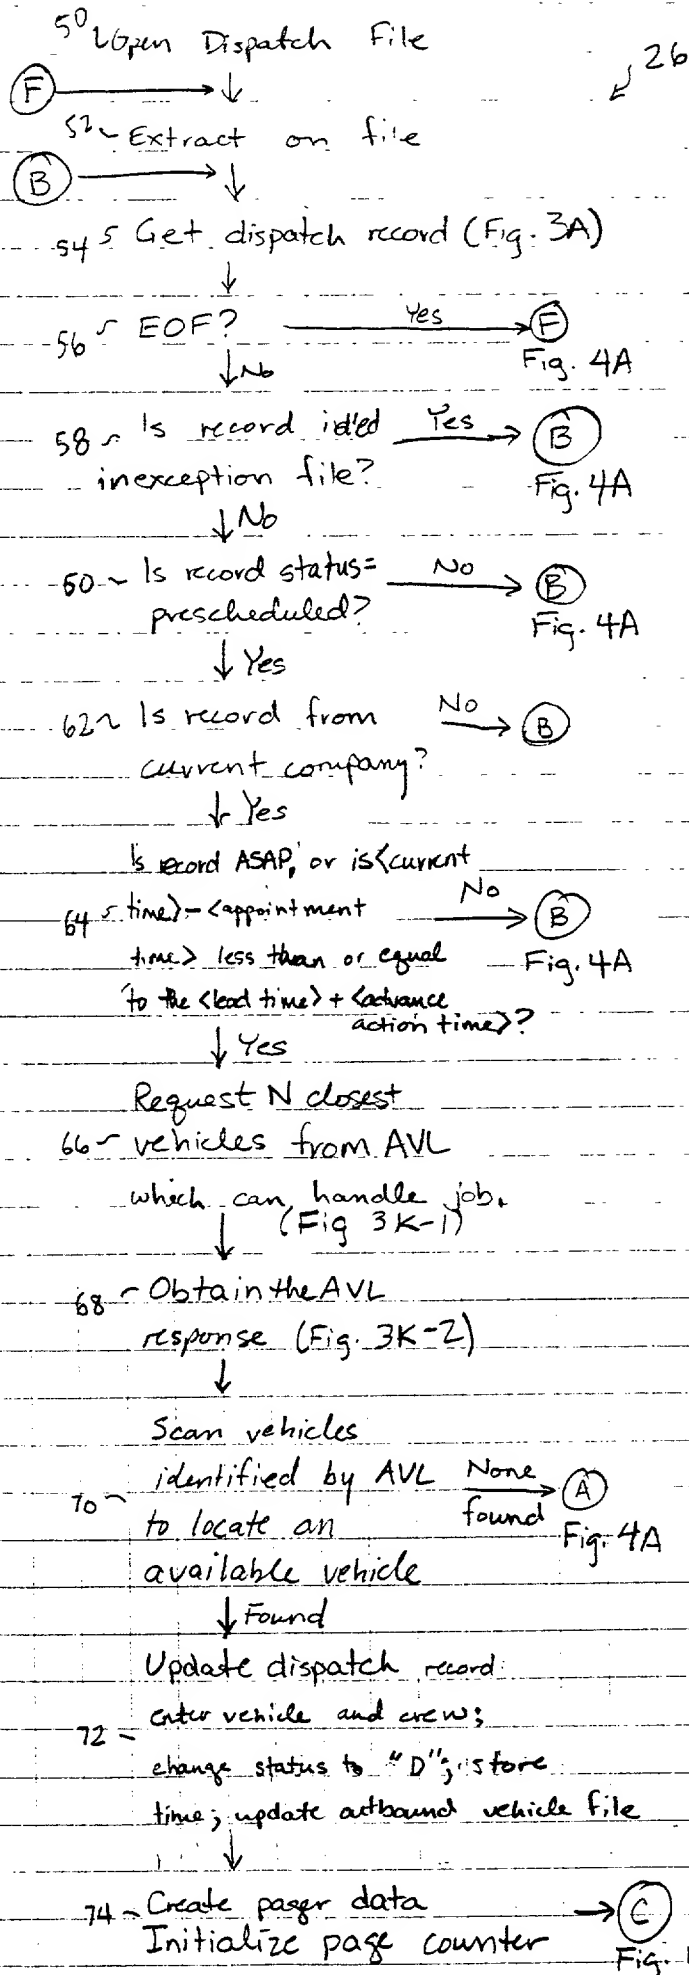
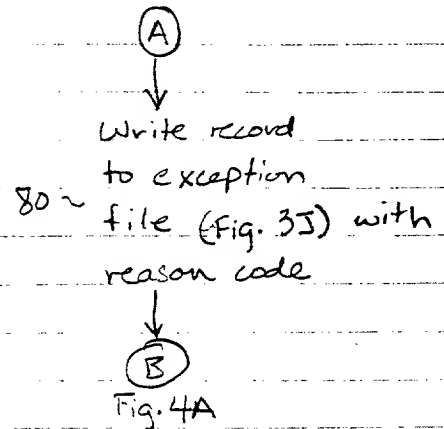


Fig. 4A




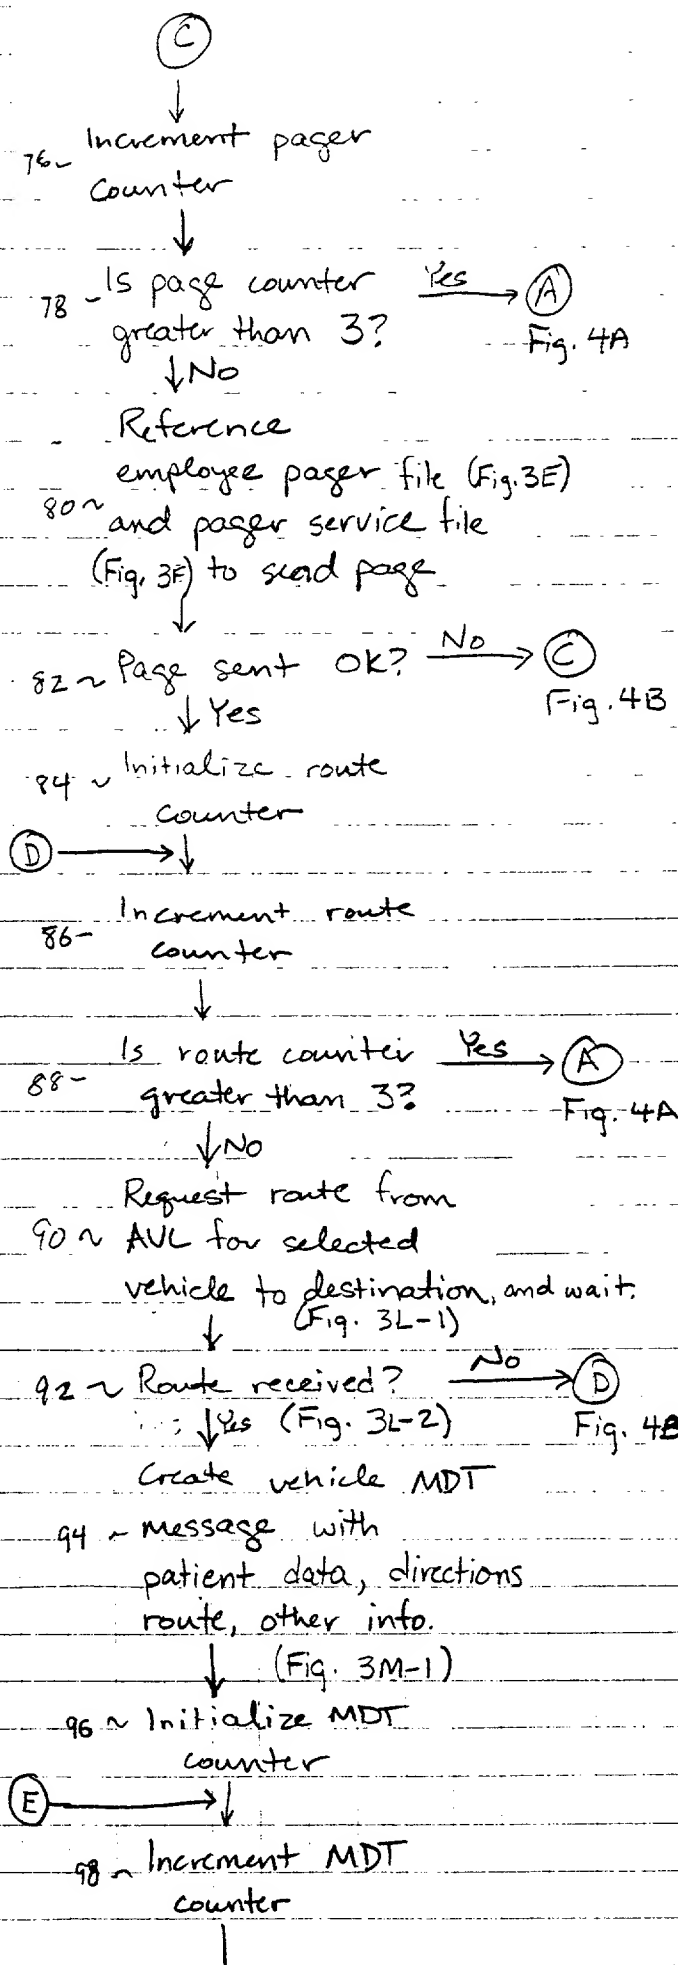


Fig. 4B

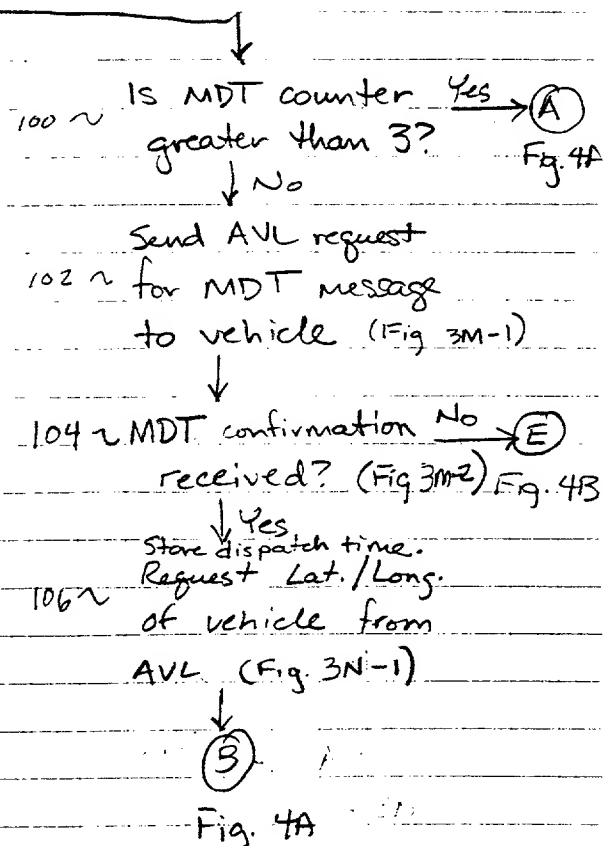

120 ~ Open Dispatch File

① → ↓

122 ~ Extract on file

② → ↓

Get dispatch

124 ~ record (Fig. 3A)

↓

126 ~ EOF?

→ ③ Fig. 5

128 ~ Is record id'd in exception file?

Yes → ④ Fig. 5

↓ No

130 ~ Is record status = dispatched?

No → ⑤ Fig. 5

↓ Yes

132 ~ Is record from current company?

No → ⑥ Fig. 5

↓ Yes

134 ~ Has vehicle reported as arrived?

Yes

↓ No

136 ~ Is this an appointment or ASAP record?

ASAP

→ 138

Appointment

Compare <current time> minus <time of call> to <ASAP limit> to determine whether vehicle is late

Compare <appointment time> and <current time> to determine whether vehicle is late.

Vehicle Late

⑦ Fig. 5

Vehicle Not late

Vehicle Not late

140 ~ Status late monitoring enabled for company?

↓ Yes

Compare limit setting for current status to

Vehicle Late → ⑧ Fig. 5

142 <current time> -

<status time> to determine whether vehicle is late.

28

Fig. 5

⑨

Write record

to exception

file (Fig. 3J) with reason code

↓

⑩

Fig. 5

144 ~ Has vehicle reported as available? No → ⑪ Fig. 5

↓ Yes

Mark record as finished and write

146 to dispatch file. Delete record from outboard vehicle file

Create invoice record (Fig. 3B) from dispatch

148 record and write to invoice file

↓

Notify AVL of new vehicle

150 status (Fig. 30-1)

⑫

Fig. 5

Open AVL port,
170 ~ Responses and
Requests File

(A)

↓
172 ~ Read Record from
Requests File

5 24

174 ~ End of File?

YES

(B)

Fig. 6B

(E)

NO

Write Record

176 ~ to AVL port

178 ~ Set Counter = 0

↓
180 ~ Acknowledgment
Received?

YES

181
Delete record
from requests file

(B)

Fig. 6B

NO

Counter =

182 ~ Counter + 1

NO

Counter > 2? ~ 184

YES

186 ~ Format Exception
Record

188 ~ Write Exception
Record

(B)

Fig. 6B

Fig. 6A

